



Air Conditioning & Heating

PRODUCT SPECIFICATIONS



**UP TO 18 SEER
R-410A**

**COOLING CAPACITY:
34,000 - 56,000 BTU/H**



* To receive the Lifetime Compressor Limited Warranty and 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Québec. Full warranty details available at www.goodmanmfg.com.

DSX18

SPLIT SYSTEM AIR CONDITIONER

The Goodman® brand DSX18 Air Conditioner uses the chlorine-free refrigerant R-410A and features energy efficiencies and operating sound levels that are among the best in the heating and cooling industry. The DSX18 contains the two-stage, high-efficiency Copeland® scroll compressor, which provides improved temperature and humidity control. This unit is designed for the consumer who desires superb comfort and quiet operation.

Standard Features

- R-410A chlorine-free refrigerant
- Two-Stage Copeland UltraTech scroll compressor
- High-density foam compressor sound blanket
- Copeland ComfortAlert diagnostics
- Low-pressure switch
- Fully charged for 15' of tubing length
- Factory-installed filter dryer
- Highly efficient condenser fan motor
- Copper tube/enhanced aluminum fin coil
- Sweat connection service valves with easy access to gauge ports
- AHRI Certified; ETL Listed

Cabinet Features


- Goodman® sound control top design
- Wire fan discharge grille
- Steel louver coil guard
- Baked-on powder-paint finish
- Rust-resistant coated screws
- Compact footprint
- Top and side maintenance access
- Single-panel access to controls with space provided for field-installed accessories
- When properly anchored, meets the 2001 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)

Contents

Nomenclature.....	2
Product Specifications.....	3
Expanded Cooling Data.....	4
AHRI Performance Ratings.....	16
Dimensions.....	24
Wiring Diagram.....	25
Accessories	26



NOMENCLATURE

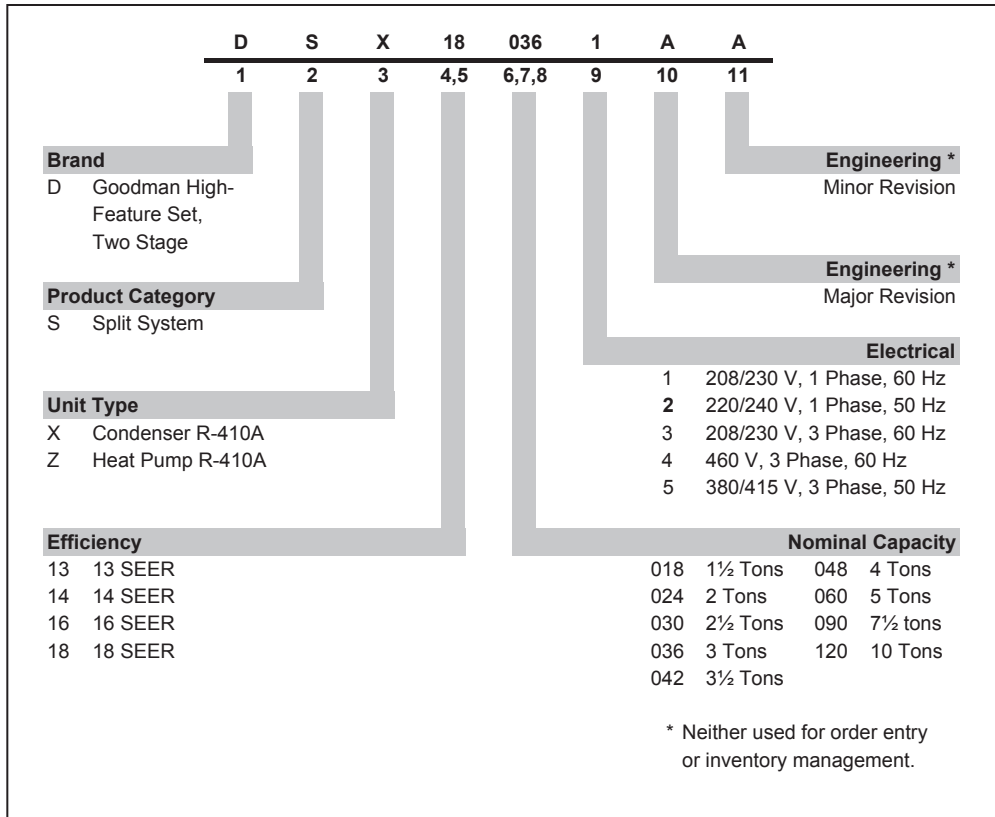

SPECIFICATIONS

	DSX18 0361A	DSX18 0481A	DSX18 0601A
COOLING CAPACITY			
Nominal Cooling (BTU/h)	35,000	47,000	57,000
Decibels	71	72	74
COMPRESSOR			
RLA	16.6	21.1	25.6
LRA	82	96	118
CONDENSER FAN MOTOR			
Horsepower (RPM)	1/3	1/3	1/3
FLA	2.80	2.80	2.80
REFRIGERATION SYSTEM			
Liquid Valve Size ("O.D.)	3/8"	3/8"	3/8"
Suction Valve Size ("O.D.)	7/8"	7/8"	7/8"
Valve Connection Type	Sweat	Sweat	Sweat
Refrigerant Charge	187	262	262
Expansion Device	TXV	TXV	TXV
Superheat at Service Valve	7-9°F	7-9°F	7-9°F
Subcooling at Service Valve	5-7°F	5-7°F	5-7°F
ELECTRICAL DATA			
Voltage-Phase-Hz	208/230-1-60	208/230-1-60	208/230-1-60
Minimum Circuit Ampacity ¹	23.6	29.2	34.8
Max. Overcurrent Protection ²	40	50	60
Min / Max Volts	197 / 253	197 / 253	197 / 253
Electrical Conduit Size	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"
SHIP WEIGHT (LBS)	270	320	330

¹ Wire size should be determined in accordance with National Electrical Codes; extensive wire runs will require larger wire sizes

² Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

NOTES

- Always check the S&R plate for electrical data on the unit being installed.
- Installer will need to supply 7/8" to 1 1/8" adapters for suction line connections.
- Unit is charged with refrigerant for 15' of 3/8" liquid line. System charge must be adjusted per Installation Instructions Final Charge Procedure.
- Installation of these units that require a TXV Kit to be installed on the indoor coil.
PLEASE NOTE: the specified TXV is determined by the outdoor unit, not the indoor coil.

Important EnergyStar Notice: EnergyStar ratings are dependent upon conditions beyond equipment installation. Proper sizing and installation of equipment is critical to achieve optimal performance. Split system air conditioners and heat pumps must be matched with appropriate coil components to meet EnergyStar criteria. Ask your contractor for details or visit www.energystar.gov.

EXPANDED COOLING DATA: DSX180361A* — LOW STAGE

IDB	Airflow	Outdoor Ambient Temperature																								
		65°F				75°F				85°F				95°F				105°F				115°F				
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
70	930	MBh	25.3	26.2	28.8	-	24.7	25.6	28.1	-	24.1	25.0	27.4	-	23.6	24.4	26.8	-	22.4	23.2	25.4	-	20.7	21.5	23.5	-
		S/T	0.76	0.63	0.44	-	0.79	0.66	0.45	-	0.81	0.67	0.47	-	0.83	0.70	0.48	-	0.86	0.72	0.50	-	0.87	0.73	0.50	-
		ΔT	19	16	12	-	19	17	13	-	19	17	13	-	19	17	13	-	19	17	13	-	18	15	12	-
		kW	1.30	1.33	1.38	-	1.41	1.45	1.50	-	1.51	1.55	1.60	-	1.60	1.63	1.69	-	1.67	1.71	1.77	-	1.73	1.77	1.84	-
		Amps	5.3	5.5	5.7	-	5.8	5.9	6.1	-	6.3	6.5	6.7	-	6.7	6.9	7.1	-	7.2	7.4	7.6	-	7.6	7.8	8.1	-
		HI PR	210	226	229	-	237	255	259	-	270	290	295	-	308	331	335	-	332	357	362	-	394	423	429	-
	825	Lo PR	124	128	140	-	128	132	144	-	132	136	149	-	135	140	153	-	138	143	156	-	142	146	159	-
		MBh	24.6	25.5	27.9	-	24.0	24.9	27.3	-	23.4	24.3	26.6	-	22.9	23.7	26.0	-	21.7	22.5	24.7	-	20.1	20.9	22.9	-
		S/T	0.72	0.60	0.42	-	0.75	0.63	0.43	-	0.77	0.64	0.44	-	0.79	0.66	0.46	-	0.82	0.69	0.48	-	0.83	0.69	0.48	-
		ΔT	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	19	16	12	-
		kW	1.29	1.32	1.37	-	1.40	1.43	1.48	-	1.50	1.53	1.59	-	1.58	1.62	1.68	-	1.65	1.69	1.75	-	1.72	1.76	1.82	-
		Amps	5.3	5.4	5.6	-	5.7	5.9	6.1	-	6.2	6.4	6.6	-	6.7	6.8	7.1	-	7.1	7.3	7.5	-	7.6	7.7	8.0	-
720	HI PR	208	224	227	-	235	253	256	-	267	288	292	-	305	327	332	-	329	354	359	-	390	419	425	-	
	Lo PR	123	127	138	-	126	130	142	-	131	135	147	-	134	138	151	-	137	141	154	-	140	145	158	-	
	MBh	22.7	23.5	25.8	-	22.2	23.0	25.2	-	21.6	22.4	24.6	-	21.1	21.9	24.0	-	20.1	20.8	22.8	-	18.6	19.3	21.1	-	
	S/T	0.70	0.58	0.40	-	0.72	0.60	0.42	-	0.74	0.62	0.43	-	0.77	0.64	0.44	-	0.79	0.66	0.46	-	0.80	0.67	0.46	-	
	ΔT	20	18	13	-	20	18	13	-	20	18	13	-	21	18	14	-	20	18	13	-	19	16	12	-	
	kW	1.28	1.31	1.36	-	1.39	1.42	1.47	-	1.48	1.52	1.57	-	1.57	1.60	1.66	-	1.64	1.68	1.74	-	1.70	1.74	1.80	-	
75	930	MBh	25.8	26.5	28.7	30.8	25.2	25.9	28.0	30.1	24.6	25.3	27.4	29.4	24.0	24.7	26.7	28.7	22.8	23.4	25.4	27.2	21.1	21.7	23.5	25.2
		S/T	0.86	0.77	0.58	0.38	0.89	0.80	0.60	0.39	0.92	0.82	0.62	0.40	0.95	0.85	0.64	0.41	0.98	0.88	0.66	0.43	0.99	0.89	0.67	0.43
		ΔT	22	20	17	11	22	20	17	12	22	20	17	12	22	21	17	12	22	20	17	12	21	19	16	11
		kW	1.30	1.33	1.38	1.43	1.41	1.45	1.50	1.55	1.51	1.55	1.60	1.66	1.60	1.63	1.69	1.75	1.67	1.71	1.77	1.83	1.73	1.77	1.84	1.90
		Amps	5.3	5.5	5.7	5.9	5.8	5.9	6.1	6.4	6.3	6.5	6.7	6.9	6.7	6.9	7.1	7.4	7.2	7.4	7.6	7.9	7.6	7.8	8.1	8.4
		HI PR	210	226	229	234	237	255	259	265	270	290	295	301	308	331	335	343	332	357	362	370	394	423	429	439
	825	Lo PR	124	128	140	149	128	132	144	153	132	136	149	158	135	140	153	162	138	143	156	166	142	146	159	170
		MBh	25.0	25.7	27.9	29.9	24.4	25.1	27.2	29.2	23.8	24.5	26.6	28.5	23.3	23.9	25.9	27.8	22.1	22.8	24.6	26.4	20.5	21.1	22.8	24.5
		S/T	0.82	0.74	0.56	0.36	0.85	0.76	0.58	0.37	0.87	0.78	0.59	0.38	0.90	0.81	0.61	0.39	0.94	0.84	0.63	0.41	0.94	0.84	0.64	0.41
		ΔT	23	21	17	12	23	21	17	12	23	21	18	12	23	22	18	12	23	21	17	12	22	20	16	11
		kW	1.29	1.32	1.37	1.42	1.40	1.43	1.48	1.54	1.50	1.53	1.59	1.64	1.58	1.62	1.68	1.74	1.65	1.69	1.75	1.82	1.72	1.76	1.82	1.88
		Amps	5.3	5.4	5.6	5.8	5.7	5.9	6.1	6.3	6.2	6.4	6.6	6.9	6.7	6.8	7.1	7.4	7.1	7.3	7.5	7.8	7.6	7.7	8.0	8.3
720	HI PR	208	224	227	232	235	253	256	262	267	288	292	298	305	327	332	339	329	354	359	367	390	419	425	435	
	Lo PR	123	127	138	147	126	130	142	152	131	135	147	157	134	138	151	161	137	141	154	164	140	145	158	168	
	MBh	23.1	23.8	25.7	27.6	22.5	23.2	25.1	27.0	22.0	22.7	24.5	26.3	21.5	22.1	23.9	25.7	20.4	21.0	22.7	24.4	18.9	19.5	21.1	22.6	
	S/T	0.79	0.71	0.54	0.35	0.82	0.74	0.56	0.36	0.84	0.75	0.57	0.37	0.87	0.78	0.59	0.38	0.90	0.81	0.61	0.39	0.91	0.81	0.62	0.40	
	ΔT	23	22	18	12	24	22	18	12	24	22	18	12	24	22	18	12	24	22	18	12	22	20	17	11	
	kW	1.28	1.31	1.36	1.40	1.39	1.42	1.47	1.52	1.48	1.52	1.57	1.63	1.57	1.60	1.66	1.72	1.64	1.68	1.74	1.80	1.70	1.74	1.80	1.87	
HI PR	206	221	225	230	233	250	254	259	265	285	289	295	302	324	329	336	326	350	355	363	386	415	421	430		
Lo PR	122	125	137	146	125	129	141	150	129	133	146	155	133	137	150	159	135	140	153	162	139	143	156	166		

IDB = Entering Indoor Dry Bulb Temperature
High and low pressures are measured at the liquid and suction service valves.

Shaded area is ACCA (TVA) conditions
kW = Total system power
Amps = outdoor unit amps (comp.+fan)

Design Subcooling @ AHR1 95°F Conditions, 5° - 7°F @ the Service Valve

EXPANDED COOLING DATA: DSX180361A* — LOW STAGE (CONT.)

IDB	Outdoor Ambient Temperature																								
	65°F				75°F				85°F				95°F				105°F				115°F				
Airflow	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
80	MBh	26.2	26.8	28.6	30.6	25.6	26.2	28.0	29.9	25.0	25.5	27.3	29.2	24.4	24.9	26.6	28.5	23.2	23.7	25.3	27.0	21.5	21.9	23.4	25.0
		S/T	0.95	0.89	0.72	0.54	1.00	0.92	0.75	0.56	1.00	0.94	0.77	0.57	1.00	1.00	0.79	0.59	1.00	1.00	0.82	0.61	1.00	1.00	0.83
	kW	1.30	1.33	1.38	1.43	1.41	1.45	1.50	1.55	1.51	1.55	1.60	1.66	1.60	1.63	1.69	1.75	1.67	1.71	1.77	1.83	1.73	1.77	1.84	1.90
		Amps	5.3	5.5	5.7	5.9	5.8	5.9	6.1	6.4	6.3	6.5	6.7	6.9	6.7	6.9	7.1	7.4	7.2	7.4	7.6	7.9	7.6	7.8	8.1
	HIPR	210	226	229	234	237	255	259	265	270	290	295	301	308	331	335	343	332	357	362	370	394	423	429	439
		Lo PR	124	128	140	149	128	132	144	153	132	136	149	158	135	140	153	162	138	143	156	166	142	146	159
	MBh	25.4	26.0	27.8	29.7	24.9	25.4	27.1	29.0	24.3	24.8	26.5	28.3	23.7	24.2	25.8	27.6	22.5	23.0	24.6	26.2	20.8	21.3	22.7	24.3
		S/T	0.90	0.85	0.69	0.51	0.93	0.88	0.71	0.53	0.96	0.90	0.73	0.55	0.99	0.93	0.76	0.56	1.00	0.96	0.78	0.59	1.00	0.97	0.79
	kW	26	25	21	17	26	25	22	17	26	25	22	17	26	25	22	17	26	25	22	17	23	23	20	16
		Amps	1.29	1.32	1.37	1.42	1.40	1.43	1.48	1.54	1.50	1.53	1.59	1.64	1.58	1.62	1.68	1.74	1.65	1.69	1.75	1.82	1.72	1.76	1.82
HIPR	208	224	227	232	235	253	256	262	267	288	292	298	305	327	332	339	329	354	359	367	390	419	425	435	
	Lo PR	123	127	138	147	126	130	142	152	131	135	147	157	134	138	151	161	137	141	154	164	140	145	158	168
MBh	23.5	24.0	25.6	27.4	22.9	23.4	25.0	26.8	22.4	22.9	24.5	26.1	21.9	22.3	23.9	25.5	20.8	21.2	22.7	24.2	19.2	19.6	21.0	22.4	
	S/T	0.87	0.82	0.66	0.50	0.90	0.85	0.69	0.51	0.92	0.87	0.71	0.53	0.95	0.89	0.73	0.54	0.99	0.93	0.76	0.56	1.00	0.94	0.76	0.57
kW	26	25	22	17	26	25	22	18	26	25	22	18	27	26	22	18	26	25	22	17	25	24	20	16	
	Amps	1.28	1.31	1.36	1.40	1.39	1.42	1.47	1.52	1.48	1.52	1.57	1.63	1.57	1.60	1.66	1.72	1.64	1.68	1.74	1.80	1.70	1.74	1.80	1.87
HIPR	206	221	225	230	233	250	254	259	265	285	289	295	302	324	329	336	326	350	355	363	386	415	421	430	
	Lo PR	122	125	137	146	125	129	141	150	129	133	146	155	133	137	150	159	135	140	153	162	139	143	156	166

85	MBh	26.7	27.2	28.5	30.4	26.0	26.6	27.8	29.7	25.4	25.9	27.1	29.0	24.8	25.3	26.5	28.3	23.6	24.0	25.2	26.8	21.8	22.3	23.3	24.9
		S/T	0.99	0.96	0.86	0.70	1.00	0.99	0.89	0.73	1.00	1.00	0.92	0.74	1.00	1.00	0.95	0.77	1.00	1.00	0.98	0.80	1.00	1.00	0.99
	kW	1.30	1.33	1.38	1.43	1.41	1.45	1.50	1.55	1.51	1.55	1.60	1.66	1.60	1.63	1.69	1.75	1.67	1.71	1.77	1.83	1.73	1.77	1.84	1.90
		Amps	5.3	5.5	5.7	5.9	5.8	5.9	6.1	6.4	6.3	6.5	6.7	6.9	6.7	6.9	7.1	7.4	7.2	7.4	7.6	7.9	7.6	7.8	8.1
	HIPR	210	226	229	234	237	255	259	265	270	290	295	301	308	331	335	343	332	357	362	370	394	423	429	439
		Lo PR	124	128	140	149	128	132	144	153	132	136	149	158	135	140	153	162	138	143	156	166	142	146	159
	MBh	25.9	26.4	27.6	29.5	25.3	25.8	27.0	28.8	24.7	25.2	26.4	28.1	24.1	24.6	25.7	27.4	22.9	23.3	24.4	26.1	21.2	21.6	22.6	24.1
		S/T	0.95	0.91	0.82	0.67	0.98	0.95	0.85	0.69	1.00	0.97	0.88	0.71	1.00	1.00	0.90	0.73	1.00	1.00	0.94	0.76	1.00	1.00	0.95
	kW	27	27	25	22	28	27	26	22	28	27	26	22	27	27	26	22	25	26	26	22	24	24	24	21
		Amps	1.29	1.32	1.37	1.42	1.40	1.43	1.48	1.54	1.50	1.53	1.59	1.64	1.58	1.62	1.68	1.74	1.65	1.69	1.75	1.82	1.72	1.76	1.82
HIPR	208	224	227	232	235	253	256	262	267	288	292	298	305	327	332	339	329	354	359	367	390	419	425	435	
	Lo PR	123	127	138	147	126	130	142	152	131	135	147	157	134	138	151	161	137	141	154	164	140	145	158	168
MBh	23.9	24.4	25.5	27.2	23.3	23.8	24.9	26.6	22.8	23.2	24.3	26.0	22.2	22.7	23.7	25.3	21.1	21.5	22.5	24.1	19.6	19.9	20.9	22.3	
	S/T	0.91	0.88	0.79	0.64	0.94	0.91	0.82	0.67	0.97	0.93	0.84	0.68	1.00	0.97	0.87	0.71	1.00	1.00	0.90	0.73	1.00	1.00	0.91	0.74
kW	27.8	27	26	22	28	28	26	23	28	28	26	23	28	28	26	23	27	27	27	23	25	25	24	21	
	Amps	1.28	1.31	1.36	1.40	1.39	1.42	1.47	1.52	1.48	1.52	1.57	1.63	1.57	1.60	1.66	1.72	1.64	1.68	1.74	1.80	1.70	1.74	1.80	1.87
HIPR	206	221	225	230	233	250	254	259	265	285	289	295	302	324	329	336	326	350	355	363	386	415	421	430	
	Lo PR	122	125	137	146	125	129	141	150	129	133	146	155	133	137	150	159	135	140	153	162	139	143	156	166

IDB = Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.

Shaded area is AHR1 conditions
 kW = Total system power
 Amps = outdoor unit amps (comp.+fan)
 Design Subcooling @ AHR1 95°F Conditions, 5° - 7°F @ the Service Valve

IDB = Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.

PRODUCT SPECIFICATIONS

EXPANDED COOLING DATA: DSX180601A* — LOW STAGE

Table with columns for Outdoor Ambient Temperature (65°F, 75°F, 85°F, 95°F, 105°F, 115°F) and Entering Indoor Wet Bulb Temperature. Rows include IDB, Airflow, and performance metrics (MBh, S/T, ΔT, kW, Amps, HI PR, Lo PR) for capacities 1520, 1350, and 1180.

Table with columns for Outdoor Ambient Temperature (65°F, 75°F, 85°F, 95°F, 105°F, 115°F) and Entering Indoor Wet Bulb Temperature. Rows include IDB, Airflow, and performance metrics (MBh, S/T, ΔT, kW, Amps, HI PR, Lo PR) for capacities 1520, 1350, and 1180.

IDB = Entering Indoor Dry Bulb Temperature Shaded area is ACCA (TVA) conditions High and low pressures are measured at the liquid and suction service valves. kW = Total system power Amps = outdoor unit amps (comp.+fan) Design Subcooling @ AHR1 95°F Conditions, 5° - 7°F @ the Service Valve

EXPANDED COOLING DATA: DSX180601A* – LOW STAGE (CONT.)

IDB	Airflow	Outdoor Ambient Temperature																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
		65°F							75°F							85°F							95°F							105°F							115°F																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
1520	MBh	43.8	44.8	47.9	51.2	42.8	43.8	46.7	50.0	41.8	42.7	45.6	48.8	40.8	41.7	44.5	47.6	38.7	39.6	42.3	45.2	35.9	36.7	39.2	41.9	S/T	0.91	0.85	0.69	0.52	0.94	0.88	0.72	0.54	0.96	0.90	0.74	0.55	1.00	0.93	0.76	0.57	1.00	0.97	0.79	0.59	1.00	1.00	0.79	0.59	ΔT	24	23	20	16	24	23	20	16	25	23	20	16	25	23	20	16	25	24	21	17	24	22	19	15	kW	2.43	2.49	2.57	2.67	2.64	2.70	2.79	2.89	2.82	2.89	2.99	3.10	2.98	3.05	3.16	3.28	3.12	3.19	3.31	3.43	3.24	3.31	3.43	3.56	Amps	9.4	9.6	10.0	10.3	10.2	10.4	10.8	11.2	11.1	11.4	11.8	12.2	11.9	12.2	12.6	13.1	14.0	14.3	14.8	15.4	14.8	15.1	15.7	16.3	Hi PR	226	243	247	252	248	267	271	277	291	313	317	324	331	356	361	369	372	400	406	415	430	463	469	480	Lo PR	118	122	133	141	121	125	137	146	125	129	141	150	129	133	145	154	131	136	148	158	135	139	152	161	1350	MBh	42.6	43.5	46.5	49.7	41.6	42.5	45.4	48.5	40.6	41.5	44.3	47.4	39.6	40.5	43.2	46.2	37.6	38.4	41.1	43.9	34.8	35.6	38.0	40.7	S/T	0.86	0.81	0.66	0.49	0.90	0.84	0.68	0.51	0.92	0.86	0.70	0.52	0.95	0.89	0.72	0.54	0.98	0.92	0.75	0.56	0.99	0.93	0.76	0.57	ΔT	25	24	21	17	25	24	21	17	25	24	21	17	26	24	21	17	26	24	21	17	24	23	20	16	kW	2.41	2.47	2.55	2.64	2.61	2.68	2.77	2.87	2.80	2.86	2.96	3.07	2.95	3.03	3.13	3.25	3.09	3.16	3.28	3.40	3.21	3.28	3.40	3.53	Amps	9.3	9.5	9.9	10.2	10.1	10.3	10.7	11.1	11.0	11.3	11.7	12.1	11.8	12.1	12.5	13.0	13.8	14.2	14.7	15.3	14.6	15.0	15.5	16.1	Hi PR	224	241	244	250	246	264	268	274	288	309	314	321	328	352	357	365	369	397	402	411	426	458	465	475	Lo PR	117	120	131	140	120	124	135	144	124	128	140	149	128	132	144	153	130	134	146	156	133	137	150	160	1180	MBh	39.3	40.1	42.9	45.8	38.4	39.2	41.9	44.8	37.5	38.3	40.9	43.7	36.5	37.3	39.9	42.6	34.7	35.5	37.9	40.5	32.2	32.9	35.1	37.5	S/T	0.83	0.78	0.64	0.48	0.86	0.81	0.66	0.49	0.89	0.83	0.68	0.51	0.91	0.86	0.70	0.52	0.95	0.89	0.72	0.54	0.96	0.90	0.73	0.55	ΔT	26	24	21	17	26	25	22	17	26	25	22	17	26	25	22	17	26	25	22	17	24	23	20	16	kW	2.39	2.44	2.53	2.62	2.59	2.65	2.75	2.84	2.77	2.84	2.94	3.04	2.93	3.00	3.10	3.22	3.06	3.14	3.25	3.37	3.18	3.25	3.37	3.49	Amps	9.2	9.4	9.8	10.1	10.0	10.2	10.6	11.0	10.9	11.2	11.6	12.0	11.7	12.0	12.4	12.9	13.7	14.0	14.5	15.1	14.5	14.8	15.4	16.0	Hi PR	222	238	242	247	243	262	265	271	285	306	311	318	325	349	354	362	365	393	398	407	422	454	460	470	Lo PR	116	119	130	139	119	123	134	143	123	127	138	147	126	130	142	151	129	133	145	154	132	136	149	158

1520	MBh	44.6	45.5	47.6	50.8	43.6	44.4	46.5	49.6	42.5	43.4	45.4	48.4	41.5	42.3	44.3	47.3	39.4	40.2	42.1	44.9	36.5	37.2	39.0	41.6	S/T	0.95	0.92	0.83	0.67	0.98	0.95	0.86	0.70	1.00	0.97	0.88	0.71	1.00	1.00	0.91	0.74	1.00	1.00	0.94	0.76	1.00	1.00	0.95	0.77	ΔT	26	25	24	21	26	26	24	21	25	26	24	21	25	26	24	21	24	24	24	21	22	23	22	19	kW	2.43	2.49	2.57	2.67	2.64	2.70	2.79	2.89	2.82	2.89	2.99	3.10	2.98	3.05	3.16	3.28	3.12	3.19	3.31	3.43	3.24	3.31	3.43	3.56	Amps	9.4	9.6	10.0	10.3	10.2	10.4	10.8	11.2	11.1	11.4	11.8	12.2	11.9	12.2	12.6	13.1	14.0	14.3	14.8	15.4	14.8	15.1	15.7	16.3	Hi PR	226	243	247	252	248	267	271	277	291	313	317	324	331	356	361	369	372	400	406	415	430	463	469	480	Lo PR	118	122	133	141	121	125	137	146	125	129	141	150	129	133	145	154	131	136	148	158	135	139	152	161	85	MBh	43.3	44.1	46.2	49.3	42.3	43.1	45.2	48.2	41.3	42.1	44.1	47.0	40.3	41.1	43.0	45.9	38.3	39.0	40.9	43.6	35.4	36.1	37.8	40.4	S/T	0.91	0.87	0.79	0.64	0.94	0.91	0.82	0.66	0.96	0.93	0.84	0.68	0.99	0.96	0.87	0.70	1.00	1.00	0.90	0.73	1.00	1.00	0.91	0.73	ΔT	27	26	25	22	27	27	25	22	27	27	25	22	27	27	25	22	26	26	26	25	22	24	25	23	20	kW	2.41	2.47	2.55	2.64	2.61	2.68	2.77	2.87	2.80	2.86	2.96	3.07	2.96	3.03	3.13	3.25	3.09	3.16	3.28	3.40	3.21	3.28	3.40	3.53	Amps	9.3	9.5	9.9	10.2	10.1	10.3	10.7	11.1	11.0	11.3	11.7	12.1	11.8	12.1	12.5	13.0	13.8	14.2	14.7	15.3	14.6	15.0	15.5	16.1	Hi PR	224	241	244	250	246	264	268	274	288	309	314	321	328	352	357	365	369	397	402	411	426	458	465	475	Lo PR	117	120	131	140	120	124	135	144	124	128	140	149	128	132	144	153	130	134	146	156	133	137	150	160	1180	MBh	40.0	40.7	42.7	45.5	39.0	39.8	41.7	44.5	38.1	38.8	40.7	43.4	37.2	37.9	39.7	42.3	35.3	36.0	37.7	40.2	32.7	33.4	34.9	37.3	S/T	0.87	0.84	0.76	0.62	0.91	0.87	0.79	0.64	0.93	0.90	0.81	0.66	0.96	0.92	0.83	0.68	0.99	0.96	0.87	0.70	1.00	0.97	0.87	0.71	ΔT	27.2	27	25	22	28	27	26	22	28	27	26	22	28	27	26	22	26	26	26	25	22	25	25	24	21	kW	2.39	2.44	2.53	2.62	2.59	2.65	2.75	2.84	2.77	2.84	2.94	3.04	2.93	3.00	3.10	3.22	3.06	3.14	3.25	3.37	3.18	3.25	3.37	3.49	Amps	9.2	9.4	9.8	10.1	10.0	10.2	10.6	11.0	10.9	11.2	11.6	12.0	11.7	12.0	12.4	12.9	13.7	14.0	14.5	15.1	14.5	14.8	15.4	16.0	Hi PR	222	238	242	247	243	262	265	271	285	306	311	318	325	349	354	362	365	393	398	407	422	454	460	470	Lo PR	116	119	130	139	119	123	134	143	123	127	138	147	126	130	142	151	129	133	145	154	132	136	149	158
------	-----	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	-----	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	-----	-----	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	-------	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-------	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	----	-----	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	-----	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	-----	-----	-----	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	-------	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-------	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	-----	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	-----	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	----	------	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	-----	-----	-----	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	-------	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-------	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

IDB = Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area is AHR1 conditions
 kW = Total system power
 AHR1 95°F Conditions, 5° - 7°F @ the Service Valve
 Amps = outdoor unit amps (comp. + fan)

AHRI PERFORMANCE DATA

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				AHRI #
	COIL & BLOWER UNITS	FURNACE	TOTAL	SENSIBLE	SEER ¹	EER ²	
DSX18 0361A*	AEPF313716A*+TXV		35,000	25,600	18	13	3407305
	AEPF426016B*+TXV		35,000	25,600	18	13	3407306
	AEPF426016C*+TXV		35,000	25,600	18	13	3407307
	CA*F3642*6B*+TXV	G*V90704C**	34,000	24,800	16	12.5	3606029
	CA*F3743*6A*+MBE1600**-1B*+TXV		35,000	25,600	18	13	3407308
	CA*F3743*6A*+MBE2000**-1B*+TXV		35,000	25,600	18	13	3407309
	CA*F3743*6A*+MBVC1600**-1A*+TXV		35,000	25,600	18	13	3609326
	CA*F3743*6A*+MBVC2000**-1A*+TXV		35,000	25,600	18	13	3609327
	CA*F3743*6A*+TXV	A*V80704B**	35,000	25,600	17	13	3407310
	CA*F3743*6A*+TXV	A*V80905C**	35,000	25,600	17	13	3407311
	CA*F3743*6A*+TXV	A*V81155C**	35,000	25,600	17	13	3407312
	CA*F3743*6A*+TXV	G*V950453B**	34,600	25,300	17	13	3407313
	CA*F3743*6A*+TXV	G*V950704C**	35,000	25,600	17.5	13	3407314
	CA*F3743*6A*+TXV	G*V950905D**	35,000	25,600	18	13.25	3407315
	CA*F3743*6A*+TXV	G*V951155D**	35,000	25,600	18	13	3407316
	CA*F3743*6A*+TXV	G*V90704C**	35,000	25,600	17.5	13	3560678
	CA*F3743*6A*+TXV	G*V90905D**	35,000	25,600	18	13.25	3560679
	CA*F3743*6A*+TXV	G*V91155D**	35,000	25,600	18	13	3560680
	CA*F3743*6A*+TXV	G*VC90704CXA*	35,000	25,600	17.5	13	3597747
	CA*F3743*6A*+TXV	G*VC90905DXA*	35,000	25,600	18	13.25	3597818
	CA*F3743*6A*+TXV	G*VC91155DXA*	35,000	25,600	18	13	3597920
	CA*F3743*6A*+TXV	G*VC950453BXA*	34,600	25,300	17	13	3598145
	CA*F3743*6A*+TXV	G*VC950704CXA*	35,000	25,600	17.5	13	3598433
	CA*F3743*6A*+TXV	G*VC950905DXA*	35,000	25,600	18	13.25	3598583
	CA*F3743*6A*+TXV	G*VC951155DXA*	35,000	25,600	18	13	3598817
	CA*F3743*6A*+TXV	G*V80704B**	35,000	25,600	17	13	3606566
	CA*F3743*6A*+TXV	G*V80905C**	35,000	25,600	17	13	3606567
	CA*F3743*6A*+TXV	G*V81155C**	35,000	25,600	17	13	3606568
	CA*F3743*6A*+TXV	A*VC80704BXA*	35,000	25,600	17	13	3629663
	CA*F3743*6A*+TXV	A*VC80905CXA*	35,000	25,600	17	13	3629666
	CA*F3743*6A*+TXV	G*VC80704BXA*	35,000	25,600	17	13	3629669
	CA*F3743*6A*+TXV	G*VC80905CXA*	35,000	25,600	17	13	3629673
	CA*F3743*6A*+TXV	A*VC81155CXA*	35,000	25,600	17	13	3642976
	CA*F3743*6A*+TXV	G*VC81155CXA*	35,000	25,600	17	13	3642979
	CA*F4860*6B*+TXV	G*V950905D**	35,000	25,600	17.5	13	3407317
	CA*F4860*6B*+TXV	G*V90905D**	35,000	25,600	18	13	3560681
	CA*F4860*6B*+TXV	G*VC90905DXA*	35,000	25,600	18	13	3597819
	CA*F4860*6B*+TXV	G*VC950905DXA*	35,000	25,600	17.5	13	3598584
	CA*F4860*6B*+TXV	G*V90704C**	35,000	25,600	16	12.5	3606030
	CA*F4961*6A*+MBE1600**-1B*+TXV		36,000	26,300	17.5	13	3407318
	CA*F4961*6A*+MBE2000**-1B*+TXV		36,000	26,300	19	13.5	3407579
	CA*F4961*6A*+MBVC1600**-1A*+TXV		36,000	26,300	17.5	13	3609329
CA*F4961*6A*+MBVC2000**-1A*+TXV		36,000	26,300	19	13.5	3609330	
CA*F4961*6A*+TXV	A*V80704B**	36,000	26,300	17.5	13.2	3407319	
CA*F4961*6A*+TXV	A*V80905C**	36,000	26,300	18	13.7	3407320	

See Notes on Page 23.

AHRI PERFORMANCE DATA (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				AHRI #
	COIL & BLOWER UNITS	FURNACE	TOTAL	SENSIBLE	SEER ¹	EER ²	
	CA*F4961*6A*+TXV	A*V81155C**	36,000	26,300	18	13.7	3407321
	CA*F4961*6A*+TXV	G*V950453B**	35,000	25,600	17	13	3407322
	CA*F4961*6A*+TXV	G*V950704C**	35,000	25,600	17.5	13.3	3407323
	CA*F4961*6A*+TXV	G*V950905D**	35,000	25,600	18	13.5	3407324
	CA*F4961*6A*+TXV	G*V951155D**	36,000	26,300	18.3	13.25	3407325
	CA*F4961*6A*+TXV	G*VC950453BXA*	35,000	25,600	17	13	3598157
	CA*F4961*6A*+TXV	G*VC950704CXA*	35,000	25,600	17.5	13.3	3598434
	CA*F4961*6A*+TXV	G*VC950905DXA*	35,000	25,600	18	13.5	3598585
	CA*F4961*6A*+TXV	G*VC951155DXA*	36,000	26,300	18.3	13.25	3598852
	CA*F4961*6A*+TXV	G*V90704C**	35,000	25,600	17.5	13	3606031
	CA*F4961*6A*+TXV	G*V90905D**	35,000	25,600	18	13.5	3606032
	CA*F4961*6A*+TXV	G*V91155D**	35,000	25,600	18	13.25	3606033
	CA*F4961*6A*+TXV	G*V80704B**	36,000	26,300	17.5	13.2	3606569
	CA*F4961*6A*+TXV	G*V80905C**	36,000	26,300	18	13.7	3606570
	CA*F4961*6A*+TXV	G*V81155C**	36,000	26,300	18	13.7	3606571
	CA*F4961*6A*+TXV	A*VC80704BXA*	36,000	26,300	17.5	13.2	3629677
	CA*F4961*6A*+TXV	A*VC80905CXA*	36,000	26,300	18	13.7	3629680
	CA*F4961*6A*+TXV	G*VC80704BXA*	36,000	26,300	17.5	13.2	3629683
	CA*F4961*6A*+TXV	G*VC80905CXA*	36,000	26,300	18	13.7	3629687
	CA*F4961*6A*+TXV	A*VC81155CXA*	36,000	26,300	18	13.7	3642983
	CA*F4961*6A*+TXV	G*VC81155CXA*	36,000	26,300	18	13.7	3642986
DSX18 0361A* (cont.)	CHPF3642C6C*+MBE1600**-1B*+TXV		35,000	25,600	18	13	3407326
	CHPF3642C6C*+MBVC1600**-1A*+TXV		35,000	25,600	18	13	3609331
	CHPF3642C6C*+TXV	G*V950704C**	35,000	25,600	17.5	13	3407327
	CHPF3642C6C*+TXV	G*VC950704CXA*	35,000	25,600	17.5	13	3598435
	CHPF3642D6C*+MBE2000**-1B*+TXV		35,000	25,600	18	13	3407328
	CHPF3642D6C*+MBVC2000**-1A*+TXV		35,000	25,600	18	13	3609332
	CHPF3642D6C*+TXV	G*V950905D**	35,000	25,600	18	13.25	3407329
	CHPF3642D6C*+TXV	G*V951155D**	35,000	25,600	18	13	3407330
	CHPF3642D6C*+TXV	G*VC950905DXA*	35,000	25,600	18	13.25	3598586
	CHPF3642D6C*+TXV	G*VC951155DXA*	35,000	25,600	18	13	3598818
	CHPF3743C6A*+MBE1600**-1B*+TXV		35,000	25,600	18	13	3407331
	CHPF3743C6A*+TXV	A*V80704B**	35,000	25,600	17	13	3407332
	CHPF3743C6A*+TXV	A*V80905C**	35,000	25,600	17	13	3407333
	CHPF3743C6A*+TXV	A*V81155C**	35,000	25,600	17	13	3407334
	CHPF3743C6A*+TXV	G*V950453B**	34,600	25,300	17	13	3407335
	CHPF3743C6A*+TXV	G*V950704C**	35,000	25,600	17.5	13	3407336
	CHPF3743C6A*+TXV	G*V950905D**	35,000	25,600	18	13.25	3407337
	CHPF3743C6A*+TXV	G*V951155D**	35,000	25,600	18	13	3407338
	CHPF3743C6A*+TXV	G*VC950453BXA*	34,600	25,300	17	13	3598146
	CHPF3743C6A*+TXV	G*VC950704CXA*	35,000	25,600	17.5	13	3598436
	CHPF3743C6A*+TXV	G*VC950905DXA*	35,000	25,600	18	13.25	3598587
	CHPF3743C6A*+TXV	G*VC951155DXA*	35,000	25,600	18	13	3598819
	CHPF3743C6A*+TXV	G*V80704B**	35,000	25,600	17	13	3606572
CHPF3743C6A*+TXV	G*V80905C**	35,000	25,600	17	13	3606573	

See Notes on Page 23.

AHRI PERFORMANCE DATA (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				AHRI #
	COIL & BLOWER UNITS	FURNACE	TOTAL	SENSIBLE	SEER ¹	EER ²	
DSX18 0361A* (cont.)	CHPF3743C6A*+TXV	G*V81155C**	35,000	25,600	17	13	3606574
	CHPF3743C6A*+TXV	G*VC80704BXA*	35,000	25,600	17	13	3629670
	CHPF3743C6A*+TXV	G*VC80905CXA*	35,000	25,600	17	13	3629674
	CHPF3743C6A*+TXV	G*VC81155CXA*	35,000	25,600	17	13	3642980
	CHPF3743C6B*+MBE1600**-1B*+TXV		35,000	25,600	18	13	3407339
	CHPF3743C6B*+MBVC1600**-1A*+TXV		35,000	25,600	18	13	3609334
	CHPF3743C6B*+TXV	A*V80704B**	35,000	25,600	17	13	3407340
	CHPF3743C6B*+TXV	A*V80905C**	35,000	25,600	17	13	3407341
	CHPF3743C6B*+TXV	A*V81155C**	35,000	25,600	17	13	3407342
	CHPF3743C6B*+TXV	G*V950453B**	34,600	25,300	17	13	3407343
	CHPF3743C6B*+TXV	G*V950704C**	35,000	25,600	17.5	13	3407344
	CHPF3743C6B*+TXV	G*V950905D**	35,000	25,600	18	13.25	3407345
	CHPF3743C6B*+TXV	G*V951155D**	35,000	25,600	18	13	3407346
	CHPF3743C6B*+TXV	G*VC950453BXA*	34,600	25,300	17	13	3598147
	CHPF3743C6B*+TXV	G*VC950704CXA*	35,000	25,600	17.5	13	3598437
	CHPF3743C6B*+TXV	G*VC950905DXA*	35,000	25,600	18	13.25	3598588
	CHPF3743C6B*+TXV	G*VC951155DXA*	35,000	25,600	18	13	3598820
	CHPF3743C6B*+TXV	A*VC80704BXA*	35,000	25,600	17	13	3629664
	CHPF3743C6B*+TXV	A*VC80905CXA*	35,000	25,600	17	13	3629667
	CHPF3743C6B*+TXV	A*VC81155CXA*	35,000	25,600	17	13	3642977
	CHPF3743D6A*+MBE2000**-1B*+TXV		35,000	25,600	18	13	3407347
	CHPF3743D6A*+TXV	A*V80704B**	35,000	25,600	17	13	3407348
	CHPF3743D6A*+TXV	A*V80905C**	35,000	25,600	17	13	3407349
	CHPF3743D6A*+TXV	A*V81155C**	35,000	25,600	17	13	3407350
	CHPF3743D6A*+TXV	G*V950453B**	34,600	25,300	17	13	3407351
	CHPF3743D6A*+TXV	G*V950704C**	34,600	25,300	17	13	3407352
	CHPF3743D6A*+TXV	G*V950905D**	35,000	25,600	18	13.25	3407353
	CHPF3743D6A*+TXV	G*V951155D**	35,000	25,600	18	13	3407354
	CHPF3743D6A*+TXV	G*VC950453BXA*	34,600	25,300	17	13	3598148
	CHPF3743D6A*+TXV	G*VC950704CXA*	34,600	25,300	17	13	3598395
	CHPF3743D6A*+TXV	G*VC950905DXA*	35,000	25,600	18	13.25	3598589
	CHPF3743D6A*+TXV	G*VC951155DXA*	35,000	25,600	18	13	3598821
	CHPF3743D6A*+TXV	G*V80704B**	35,000	25,600	17	13	3606575
	CHPF3743D6A*+TXV	G*V80905C**	35,000	25,600	17	13	3606576
	CHPF3743D6A*+TXV	G*V81155C**	35,000	25,600	17	13	3606577
	CHPF3743D6A*+TXV	G*VC80704BXA*	35,000	25,600	17	13	3629671
	CHPF3743D6A*+TXV	G*VC80905CXA*	35,000	25,600	17	13	3629675
	CHPF3743D6A*+TXV	G*VC81155CXA*	35,000	25,600	17	13	3642981
	CHPF3743D6B*+MBE2000**-1B*+TXV		35,000	25,600	18	13	3407355
	CHPF3743D6B*+MBVC2000**-1A*+TXV		35,000	25,600	18	13	3609335
	CHPF3743D6B*+TXV	A*V80704B**	35,000	25,600	17	13	3407356
	CHPF3743D6B*+TXV	A*V80905C**	35,000	25,600	17	13	3407357
CHPF3743D6B*+TXV	A*V81155C**	35,000	25,600	17	13	3407358	
CHPF3743D6B*+TXV	G*V950453B**	34,600	25,300	17	13	3407359	
CHPF3743D6B*+TXV	G*V950704C**	34,600	25,300	17	13	3407360	

See Notes on Page 23.

AHRI PERFORMANCE DATA (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				AHRI #
	COIL & BLOWER UNITS	FURNACE	TOTAL	SENSIBLE	SEER ¹	EER ²	
DSX18 0361A* (cont.)	CHPF3743D6B*+TXV	G*V950905D**	35,000	25,600	18	13.25	3407361
	CHPF3743D6B*+TXV	G*V951155D**	35,000	25,600	18	13	3407362
	CHPF3743D6B*+TXV	G*VC950453BXA*	34,600	25,300	17	13	3598149
	CHPF3743D6B*+TXV	G*VC950704CXA*	34,600	25,300	17	13	3598396
	CHPF3743D6B*+TXV	G*VC950905DXA*	35,000	25,600	18	13.25	3598590
	CHPF3743D6B*+TXV	G*VC951155DXA*	35,000	25,600	18	13	3598822
	CHPF3743D6B*+TXV	G*V80704B**	35,000	25,600	17	13	3606578
	CHPF3743D6B*+TXV	G*V80905C**	35,000	25,600	17	13	3606579
	CHPF3743D6B*+TXV	G*V81155C**	35,000	25,600	17	13	3606580
	CHPF3743D6B*+TXV	A*VC80704BXA*	35,000	25,600	17	13	3629665
	CHPF3743D6B*+TXV	A*VC80905CXA*	35,000	25,600	17	13	3629668
	CHPF3743D6B*+TXV	G*VC80704BXA*	35,000	25,600	17	13	3629672
	CHPF3743D6B*+TXV	G*VC80905CXA*	35,000	25,600	17	13	3629676
	CHPF3743D6B*+TXV	A*VC81155CXA*	35,000	25,600	17	13	3642978
	CHPF3743D6B*+TXV	G*VC81155CXA*	35,000	25,600	17	13	3642982
	CHPF4860D6C*+MBE2000**-1B*+TXV		35,000	25,600	18.3	13	3407363
	CHPF4860D6C*+TXV	A*V80704B**	36,000	26,300	17.5	13.2	3407364
	CHPF4860D6C*+TXV	A*V80905C**	36,000	26,300	18	13.7	3407365
	CHPF4860D6C*+TXV	A*V81155C**	36,000	26,300	18	13.7	3407366
	CHPF4860D6C*+TXV	G*V950453B**	34,600	25,300	17	13	3407367
	CHPF4860D6C*+TXV	G*V950704C**	35,000	25,600	17.5	13.3	3407368
	CHPF4860D6C*+TXV	G*V950905D**	36,000	26,300	18	13.25	3407369
	CHPF4860D6C*+TXV	G*V951155D**	35,000	25,600	18.3	13.25	3407370
	CHPF4860D6C*+TXV	G*VC950453BXA*	34,600	25,300	17	13	3598150
	CHPF4860D6C*+TXV	G*VC950704CXA*	35,000	25,600	17.5	13.3	3598438
	CHPF4860D6C*+TXV	G*VC950905DXA*	36,000	26,300	18	13.25	3598617
	CHPF4860D6C*+TXV	G*VC951155DXA*	35,000	25,600	18.3	13.25	3598823
	CHPF4860D6C*+TXV	G*V80704B**	36,000	26,300	17.5	13.2	3606581
	CHPF4860D6C*+TXV	G*V80905C**	36,000	26,300	18	13.7	3606582
	CHPF4860D6C*+TXV	G*V81155C**	36,000	26,300	18	13.7	3606583
	CHPF4860D6C*+TXV	G*VC80704BXA*	36,000	26,300	17.5	13.2	3629684
	CHPF4860D6C*+TXV	G*VC80905CXA*	36,000	26,300	18	13.7	3629688
	CHPF4860D6C*+TXV	G*VC81155CXA*	36,000	26,300	18	13.7	3642987
	CHPF4860D6D*+MBE2000**-1B*+TXV		35,000	25,600	18.3	13	3407371
	CHPF4860D6D*+MBVC2000**-1A*+TXV		35,000	25,600	18.3	13	3609337
	CHPF4860D6D*+TXV	A*V80704B**	36,000	26,300	17.5	13.2	3407372
	CHPF4860D6D*+TXV	A*V80905C**	36,000	26,300	18	13.7	3407373
	CHPF4860D6D*+TXV	A*V81155C**	36,000	26,300	18	13.7	3407374
	CHPF4860D6D*+TXV	G*V950453B**	34,600	25,300	17	13	3407375
	CHPF4860D6D*+TXV	G*V950704C**	35,000	25,600	17.5	13.3	3407376
	CHPF4860D6D*+TXV	G*V950905D**	36,000	26,300	18	13.25	3407377
	CHPF4860D6D*+TXV	G*V951155D**	35,000	25,600	18.3	13.25	3407378
CHPF4860D6D*+TXV	G*VC950453BXA*	34,600	25,300	17	13	3598151	
CHPF4860D6D*+TXV	G*VC950704CXA*	35,000	25,600	17.5	13.3	3598439	
CHPF4860D6D*+TXV	G*VC950905DXA*	36,000	26,300	18	13.25	3598618	

See Notes on Page 23.

AHRI PERFORMANCE DATA (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				AHRI #
	COIL & BLOWER UNITS	FURNACE	TOTAL	SENSIBLE	SEER ¹	EER ²	
DSX18 0361A* (cont.)	CHPF4860D6D*+TXV	G*VC951155DXA*	35,000	25,600	18.3	13.25	3598824
	CHPF4860D6D*+TXV	G*V80704B**	36,000	26,300	17.5	13.2	3606584
	CHPF4860D6D*+TXV	G*V80905C**	36,000	26,300	18	13.7	3606585
	CHPF4860D6D*+TXV	G*V81155C**	36,000	26,300	18	13.7	3606586
	CHPF4860D6D*+TXV	A*VC80704BXA*	36,000	26,300	17.5	13.2	3629678
	CHPF4860D6D*+TXV	A*VC80905CXA*	36,000	26,300	18	13.7	3629681
	CHPF4860D6D*+TXV	G*VC80704BXA*	36,000	26,300	17.5	13.2	3629685
	CHPF4860D6D*+TXV	G*VC80905CXA*	36,000	26,300	18	13.7	3629689
	CHPF4860D6D*+TXV	A*VC81155CXA*	36,000	26,300	18	13.7	3642984
	CHPF4860D6D*+TXV	G*VC81155CXA*	36,000	26,300	18	13.7	3642988
	CHTF3743C6A*+MBE1600**-1B*+TXV		35,000	25,600	18	13	3407379
	CHTF3743C6A*+MBVC1600**-1A*+TXV		35,000	25,600	18	13	3609338
	CHTF3743D6A*+MBE2000**-1B*+TXV		35,000	25,600	18	13	3407380
	CHTF3743D6A*+MBVC2000**-1A*+TXV		35,000	25,600	18	13	3609339
	CHTF4860D6A*+MBE2000**-1B*+TXV		36,000	26,300	18.3	13	3407381
	CHTF4860D6A*+MBVC2000**-1A*+TXV		36,000	26,300	18.3	13	3609340
	CSCF3642N6C*+MBE1600**-1B*+TXV		34,600	25,300	17.5	13	3407580
	CSCF3642N6C*+MBE2000**-1B*+TXV		35,000	25,600	18	13	3407581
	CSCF3642N6C*+MBVC1600**-1A*+TXV		34,600	25,300	17.5	13	3609342
	CSCF3642N6C*+MBVC2000**-1A*+TXV		35,000	25,600	18	13	3609343
	CSCF3642N6C*+TXV	A*V80704B**	34,600	25,300	17	13	3407382
	CSCF3642N6C*+TXV	A*V80905C**	34,600	25,300	17	13	3407383
	CSCF3642N6C*+TXV	A*V81155C**	34,600	25,300	17	13	3407384
	CSCF3642N6C*+TXV	G*V950453B**	34,600	25,300	17	13	3407385
	CSCF3642N6C*+TXV	G*V950704C**	34,600	25,300	17	13	3407386
	CSCF3642N6C*+TXV	G*V950905D**	34,600	25,300	17.5	13	3407387
	CSCF3642N6C*+TXV	G*V951155D**	34,600	25,300	17.5	13	3407388
	CSCF3642N6C*+TXV	G*VC950453BXA*	34,600	25,300	17	13	3598152
	CSCF3642N6C*+TXV	G*VC950704CXA*	34,600	25,300	17	13	3598397
	CSCF3642N6C*+TXV	G*VC950905DXA*	34,600	25,300	17.5	13	3598548
	CSCF3642N6C*+TXV	G*VC951155DXA*	34,600	25,300	17.5	13	3598778
	CSCF3642N6C*+TXV	G*V80704B**	34,600	25,300	17	13	3606587
	CSCF3642N6C*+TXV	G*V80905C**	34,600	25,300	17	13	3606588
	CSCF3642N6C*+TXV	G*V81155C**	34,600	25,300	17	13	3606589
	CSCF3642N6C*+TXV	A*VC80704BXA*	34,600	25,300	17	13	3629638
	CSCF3642N6C*+TXV	A*VC80905CXA*	34,600	25,300	17	13	3629639
	CSCF3642N6C*+TXV	G*VC80704BXA*	34,600	25,300	17	13	3629646
	CSCF3642N6C*+TXV	G*VC80905CXA*	34,600	25,300	17	13	3629647
	CSCF3642N6C*+TXV	A*VC81155CXA*	34,600	25,300	17	13	3642968
	CSCF3642N6C*+TXV	G*VC81155CXA*	34,600	25,300	17	13	3642974
	CSCF4860N6C*+MBE1600**-1B*+TXV		35,000	25,600	18	13	3407582
	CSCF4860N6C*+MBE2000**-1B*+TXV		35,000	25,600	18.3	13	3407583
CSCF4860N6C*+MBVC1600**-1A*+TXV		35,000	25,600	18	13	3609345	
CSCF4860N6C*+MBVC2000**-1A*+TXV		35,000	25,600	18.3	13	3609346	
CSCF4860N6C*+TXV	A*V80704B**	36,000	26,300	17.5	13.2	3407389	

See Notes on Page 23.

AHRI PERFORMANCE DATA (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				AHRI #
	COIL & BLOWER UNITS	FURNACE	TOTAL	SENSIBLE	SEER ¹	EER ²	
DSX18 0361A* (cont.)	CSCF4860N6C*+TXV	A*V80905C**	36,000	26,300	18	13.7	3407390
	CSCF4860N6C*+TXV	A*V81155C**	36,000	26,300	18	13.7	3407391
	CSCF4860N6C*+TXV	G*V950453B**	34,600	25,300	17	13	3407392
	CSCF4860N6C*+TXV	G*V950704C**	34,600	25,300	17.5	13	3407393
	CSCF4860N6C*+TXV	G*V950905D**	35,000	25,600	18	13.25	3407394
	CSCF4860N6C*+TXV	G*V951155D**	35,000	25,600	18.3	13.25	3407395
	CSCF4860N6C*+TXV	G*VC950453BXA*	34,600	25,300	17	13	3598153
	CSCF4860N6C*+TXV	G*VC950704CXA*	34,600	25,300	17.5	13	3598398
	CSCF4860N6C*+TXV	G*VC950905DXA*	35,000	25,600	18	13.25	3598591
	CSCF4860N6C*+TXV	G*VC951155DXA*	35,000	25,600	18.3	13.25	3598825
	CSCF4860N6C*+TXV	G*V80704B**	36,000	26,300	17.5	13.2	3606590
	CSCF4860N6C*+TXV	G*V80905C**	36,000	26,300	18	13.7	3606591
	CSCF4860N6C*+TXV	G*V81155C**	36,000	26,300	18	13.7	3606592
	CSCF4860N6C*+TXV	A*VC80704BXA*	36,000	26,300	17.5	13.2	3629679
	CSCF4860N6C*+TXV	A*VC80905CXA*	36,000	26,300	18	13.7	3629682
	CSCF4860N6C*+TXV	G*VC80704BXA*	36,000	26,300	17.5	13.2	3629686
	CSCF4860N6C*+TXV	G*VC80905CXA*	36,000	26,300	18	13.7	3629690
	CSCF4860N6C*+TXV	A*VC81155CXA*	36,000	26,300	18	13.7	3642985
	CSCF4860N6C*+TXV	G*VC81155CXA*	36,000	26,300	18	13.7	3642989
	CT*F3642*6A*+MBE1600**-1B*+TXV		35,000	25,600	18	13	3407396
CT*F3642*6A*+MBVC1600**-1A*+TXV		35,000	25,600	18	13	3609347	
CT*F4860*6A*+MBE2000**-1B*+TXV		36,000	26,300	19	13.5	3407397	
CT*F4860*6A*+MBVC2000**-1A*+TXV		36,000	26,300	19	13.5	3609348	
DSX18 0481A*	AEPF426016B*+TXV		47,000	35,700	17.5	12.6	3407398
	AEPF426016C*+TXV		47,000	35,700	17.5	13	3407584
	CA*F4961*6A*+MBE1600**-1B*+TXV		46,000	35,000	17	13	3407399
	CA*F4961*6A*+MBE2000**-1B*+TXV		47,500	36,100	18.3	13.25	3407585
	CA*F4961*6A*+MBVC1600**-1A*+TXV		46,000	35,000	17	13	3609350
	CA*F4961*6A*+MBVC2000**-1A*+TXV		47,500	36,100	18.3	13.25	3609351
	CA*F4961*6A*+TXV	A*V80905C**	48,000	36,500	17	13	3407400
	CA*F4961*6A*+TXV	A*V81155C**	48,000	36,500	17	13	3407401
	CA*F4961*6A*+TXV	G*V950704C**	46,000	35,000	17	13	3407402
	CA*F4961*6A*+TXV	G*V950905D**	47,000	35,700	17.5	13	3407403
	CA*F4961*6A*+TXV	G*V951155D**	47,000	35,700	18	13	3407404
	CA*F4961*6A*+TXV	G*V90905D**	46,500	35,300	16.5	13	3560701
	CA*F4961*6A*+TXV	G*V91155D**	46,500	35,300	16.5	13	3560702
	CA*F4961*6A*+TXV	G*VC90905DXA*	46,500	35,300	16.5	13	3597874
	CA*F4961*6A*+TXV	G*VC91155DXA*	46,500	35,300	16.5	13	3597940
	CA*F4961*6A*+TXV	G*VC950704CXA*	46,000	35,000	17	13	3598471
	CA*F4961*6A*+TXV	G*VC950905DXA*	47,000	35,700	17.5	13	3598710
	CA*F4961*6A*+TXV	G*VC951155DXA*	47,000	35,700	18	13	3598942
	CA*F4961*6A*+TXV	G*V80905C**	48,000	36,500	17	13	3606593
	CA*F4961*6A*+TXV	G*V81155C**	48,000	36,500	17	13	3606594
	CA*F4961*6A*+TXV	A*VC80905CXA*	48,000	36,500	17	13	3629708
	CA*F4961*6A*+TXV	A*VC81155CXA*	48,000	36,500	17	12.2	3642994
	CA*F4961*6A*+TXV	G*VC80905CXA*	48,000	36,500	17	12.2	3642997
CHPF4860D6C*+MBE1600**-1B*+TXV		46,000	35,000	17	13	3407405	
CHPF4860D6C*+MBE2000**-1B*+TXV		47,500	36,100	18.3	13.25	3407406	

See Notes on Page 23.

AHRI PERFORMANCE DATA (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				AHRI #
	COIL & BLOWER UNITS	FURNACE	TOTAL	SENSIBLE	SEER ¹	EER ²	
DSX18 0481A* (cont.)	CHPF4860D6C*+TXV	A*V80905C**	48,000	36,500	17	13	3407407
	CHPF4860D6C*+TXV	A*V81155C**	48,000	36,500	17	13	3407408
	CHPF4860D6C*+TXV	G*V950704C**	46,000	35,000	17	13	3407409
	CHPF4860D6C*+TXV	G*V950905D**	47,000	35,700	17.5	13	3407410
	CHPF4860D6C*+TXV	G*V951155D**	47,500	36,100	18	13	3407411
	CHPF4860D6C*+TXV	G*VC950704CXA*	46,000	35,000	17	13	3598472
	CHPF4860D6C*+TXV	G*VC950905DXA*	47,000	35,700	17.5	13	3598711
	CHPF4860D6C*+TXV	G*VC951155DXA*	47,500	36,100	18	13	3598943
	CHPF4860D6C*+TXV	G*V80905C**	48,000	36,500	17	13	3606595
	CHPF4860D6C*+TXV	G*V81155C**	48,000	36,500	17	13	3606596
	CHPF4860D6C*+TXV	G*VC80905CXA*	48,000	36,500	17	12.2	3642998
	CHPF4860D6D*+MBE1600** -1B*+TXV		46,000	35,000	17	13	3407412
	CHPF4860D6D*+MBE2000** -1B*+TXV		47,500	36,100	18.3	13.25	3407413
	CHPF4860D6D*+MBVC1600** -1A*+TXV		46,000	35,000	17	13	3609353
	CHPF4860D6D*+MBVC2000** -1A*+TXV		47,500	36,100	18.3	13.25	3609354
	CHPF4860D6D*+TXV	A*V80905C**	48,000	36,500	17	13	3407414
	CHPF4860D6D*+TXV	A*V81155C**	48,000	36,500	17	13	3407415
	CHPF4860D6D*+TXV	G*V950704C**	46,000	35,000	17	13	3407416
	CHPF4860D6D*+TXV	G*V950905D**	47,000	35,700	17.5	13	3407417
	CHPF4860D6D*+TXV	G*V951155D**	47,500	36,100	18	13	3407418
	CHPF4860D6D*+TXV	G*VC950704CXA*	46,000	35,000	17	13	3598473
	CHPF4860D6D*+TXV	G*VC950905DXA*	47,000	35,700	17.5	13	3598712
	CHPF4860D6D*+TXV	G*VC951155DXA*	47,500	36,100	18	13	3598944
	CHPF4860D6D*+TXV	G*V80905C**	48,000	36,500	17	13	3606597
	CHPF4860D6D*+TXV	G*V81155C**	48,000	36,500	17	13	3606598
	CHPF4860D6D*+TXV	A*VC80905CXA*	48,000	36,500	17	13	3629709
	CHPF4860D6D*+TXV	A*VC81155CXA*	48,000	36,500	17	12.2	3642995
	CHPF4860D6D*+TXV	G*VC80905CXA*	48,000	36,500	17	12.2	3642999
	CHTF4860D6A*+MBE2000** -1B*+TXV		47,000	35,700	18.3	13.25	3407419
	CHTF4860D6A*+MBVC2000** -1A*+TXV		47,000	35,700	18.3	13.25	3609355
	CSCF4860N6C*+MBE1600** -1B*+TXV		46,000	35,000	17	13	3407586
	CSCF4860N6C*+MBE2000** -1B*+TXV		47,500	36,100	18.3	13.25	3407587
	CSCF4860N6C*+MBVC1600** -1A*+TXV		46,000	35,000	17	13	3609356
	CSCF4860N6C*+MBVC2000** -1A*+TXV		47,500	36,100	18.3	13.25	3609358
	CSCF4860N6C*+TXV	A*V80905C**	48,000	36,500	17	13	3407420
	CSCF4860N6C*+TXV	A*V81155C**	48,000	36,500	17	13	3407421
	CSCF4860N6C*+TXV	G*V950704C**	46,000	35,000	17	13	3407422
	CSCF4860N6C*+TXV	G*V950905D**	47,000	35,700	17.5	13	3407423
	CSCF4860N6C*+TXV	G*V951155D**	47,500	36,100	18	13	3407424
	CSCF4860N6C*+TXV	G*VC950704CXA*	46,000	35,000	17	13	3598474
	CSCF4860N6C*+TXV	G*VC950905DXA*	47,000	35,700	17.5	13	3598713
	CSCF4860N6C*+TXV	G*VC951155DXA*	47,500	36,100	18	13	3598945
	CSCF4860N6C*+TXV	G*V80905C**	48,000	36,500	17	13	3606599
	CSCF4860N6C*+TXV	G*V81155C**	48,000	36,500	17	13	3606600
	CSCF4860N6C*+TXV	A*VC80905CXA*	48,000	36,500	17	13	3629710
CSCF4860N6C*+TXV	A*VC81155CXA*	48,000	36,500	17	12.2	3642996	
CSCF4860N6C*+TXV	G*VC80905CXA*	48,000	36,500	17	12.2	3643000	
CT*F4860*6A*+MBE2000** -1B*+TXV		47,000	35,700	18.3	13.25	3407425	
CT*F4860*6A*+MBVC2000** -1A*+TXV		47,000	35,700	18.3	13.25	3609359	

See Notes on Page 23.

AHRI PERFORMANCE DATA (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				AHRI #
	COIL & BLOWER UNITS	FURNACE	TOTAL	SENSIBLE	SEER ¹	EER ²	
DSX18 0601A*	AEPF426016B*+TXV		58,000	42,300	16	11.75	3407426
	AEPF426016C*+TXV		58,000	42,300	16	11.75	3407427
	CA*F4961*6A*+MBE2000**-1B*+TXV		58,000	42,300	17	12	3407588
	CA*F4961*6A*+MBVC2000**-1A*+TXV		58,000	42,300	17	12	3609360
	CA*F4961*6A*+TXV	A*V80905C**	56,000	40,900	15.8	11.2	3407428
	CA*F4961*6A*+TXV	A*V81155C**	56,000	40,900	15.8	11.2	3407429
	CA*F4961*6A*+TXV	G*V950905D**	58,000	42,300	16	11.5	3407430
	CA*F4961*6A*+TXV	G*V951155D**	58,000	42,300	16	11.5	3407431
	CA*F4961*6A*+TXV	G*V90905D**	58,000	42,300	16	11.5	3560682
	CA*F4961*6A*+TXV	G*VC90905DXA*	58,000	42,300	16	11.5	3597909
	CA*F4961*6A*+TXV	G*VC950905DXA*	58,000	42,300	16	11.5	3598738
	CA*F4961*6A*+TXV	G*VC951155DXA*	58,000	42,300	16	11.5	3598980
	CA*F4961*6A*+TXV	G*V91155D**	57,000	41,600	15	11.5	3606034
	CA*F4961*6A*+TXV	A*VC80905CXA*	56,000	40,900	15.8	11.5	3643001
	CA*F4961*6A*+TXV	A*VC81155CXA*	56,000	40,900	15.5	11.2	3643005
	CHPF4860D6C*+MBE2000**-1B*+TXV		58,000	42,300	17	12	3407432
	CHPF4860D6C*+TXV	A*V80905C**	56,000	40,900	15.8	11.2	3407433
	CHPF4860D6C*+TXV	A*V81155C**	56,000	40,900	15.8	11.2	3407434
	CHPF4860D6C*+TXV	G*V950905D**	58,000	42,300	16	11.5	3407435
	CHPF4860D6C*+TXV	G*V951155D**	58,000	42,300	16	11.75	3407436
	CHPF4860D6C*+TXV	G*VC950905DXA*	58,000	42,300	16	11.5	3598739
	CHPF4860D6C*+TXV	G*VC951155DXA*	58,000	42,300	16	11.75	3598981
	CHPF4860D6D*+MBE2000**-1B*+TXV		58,000	42,300	17	12	3407437
	CHPF4860D6D*+MBVC2000**-1A*+TXV		58,000	42,300	17	12	3609362
	CHPF4860D6D*+TXV	A*V80905C**	56,000	40,900	15.8	11.2	3407438
	CHPF4860D6D*+TXV	A*V81155C**	56,000	40,900	15.8	11.2	3407439
	CHPF4860D6D*+TXV	G*V950905D**	58,000	42,300	16	11.5	3407440
	CHPF4860D6D*+TXV	G*V951155D**	58,000	42,300	16	11.75	3407441
	CHPF4860D6D*+TXV	G*VC950905DXA*	58,000	42,300	16	11.5	3598740
	CHPF4860D6D*+TXV	G*VC951155DXA*	58,000	42,300	16	11.75	3598982
	CHPF4860D6D*+TXV	A*VC80905CXA*	56,000	40,900	15.8	11.5	3643002
	CHPF4860D6D*+TXV	A*VC81155CXA*	56,000	40,900	15.5	11.2	3643006
	CHTF4860D6A*+MBE2000**-1B*+TXV		58,000	42,300	17	12	3407442
	CHTF4860D6A*+MBVC2000**-1A*+TXV		58,000	42,300	17	12	3609363
	CSCF4860N6C*+MBE2000**-1B*+TXV		58,000	42,300	16.5	11.75	3407589
	CSCF4860N6C*+MBVC2000**-1A*+TXV		58,000	42,300	16.5	11.75	3609364
	CSCF4860N6C*+TXV	A*V80905C**	56,000	40,900	15.8	11.2	3407443
	CSCF4860N6C*+TXV	A*V81155C**	56,000	40,900	15.8	11.2	3407444
	CSCF4860N6C*+TXV	G*V950905D**	58,000	42,300	16	11.5	3407445
	CSCF4860N6C*+TXV	G*V951155D**	58,000	42,300	16	11.75	3407446
	CSCF4860N6C*+TXV	G*VC950905DXA*	58,000	42,300	16	11.5	3598741
	CSCF4860N6C*+TXV	G*VC951155DXA*	58,000	42,300	16	11.75	3598983
	CSCF4860N6C*+TXV	A*VC80905CXA*	56,000	40,900	15.8	11.5	3643003
	CSCF4860N6C*+TXV	A*VC81155CXA*	56,000	40,900	15.5	11.2	3643007
	CT*F4860*6A*+MBE2000**-1B*+TXV		58,000	42,300	17	12	3407447
	CT*F4860*6A*+MBVC2000**-1A*+TXV		58,000	42,300	17	12	3609366


¹ Seasonal Energy Efficiency Ratio; Certified per AHRI 210/240 @ 80°F/ 67°F/ 95°F

² Energy Efficiency Ratio @ 80°F/ 67°F/ 95°F

NOTES:


- Always check the S&R plate for electrical data on the unit being installed.
- When matching the outdoor unit to the indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- EEP - Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is not interchangeable with B13707-35S. The Goodman Gas Furnace contains the EEP cooling time delay

DIMENSIONS

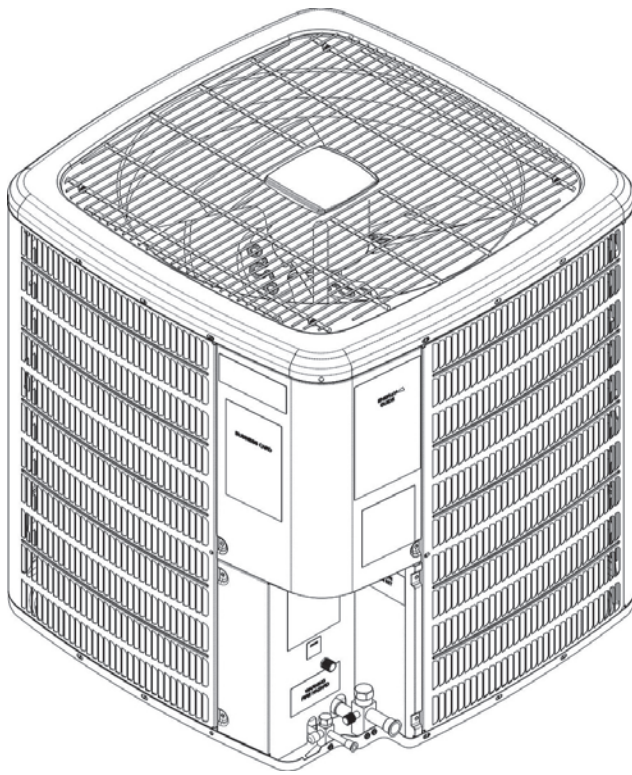

MODEL	W	D	H
DSX180361A*	35½	35½	38¼
DSX180481A*	35½	35½	38¼
DSX180601A*	35½	35½	38¼

WIRING DIAGRAM

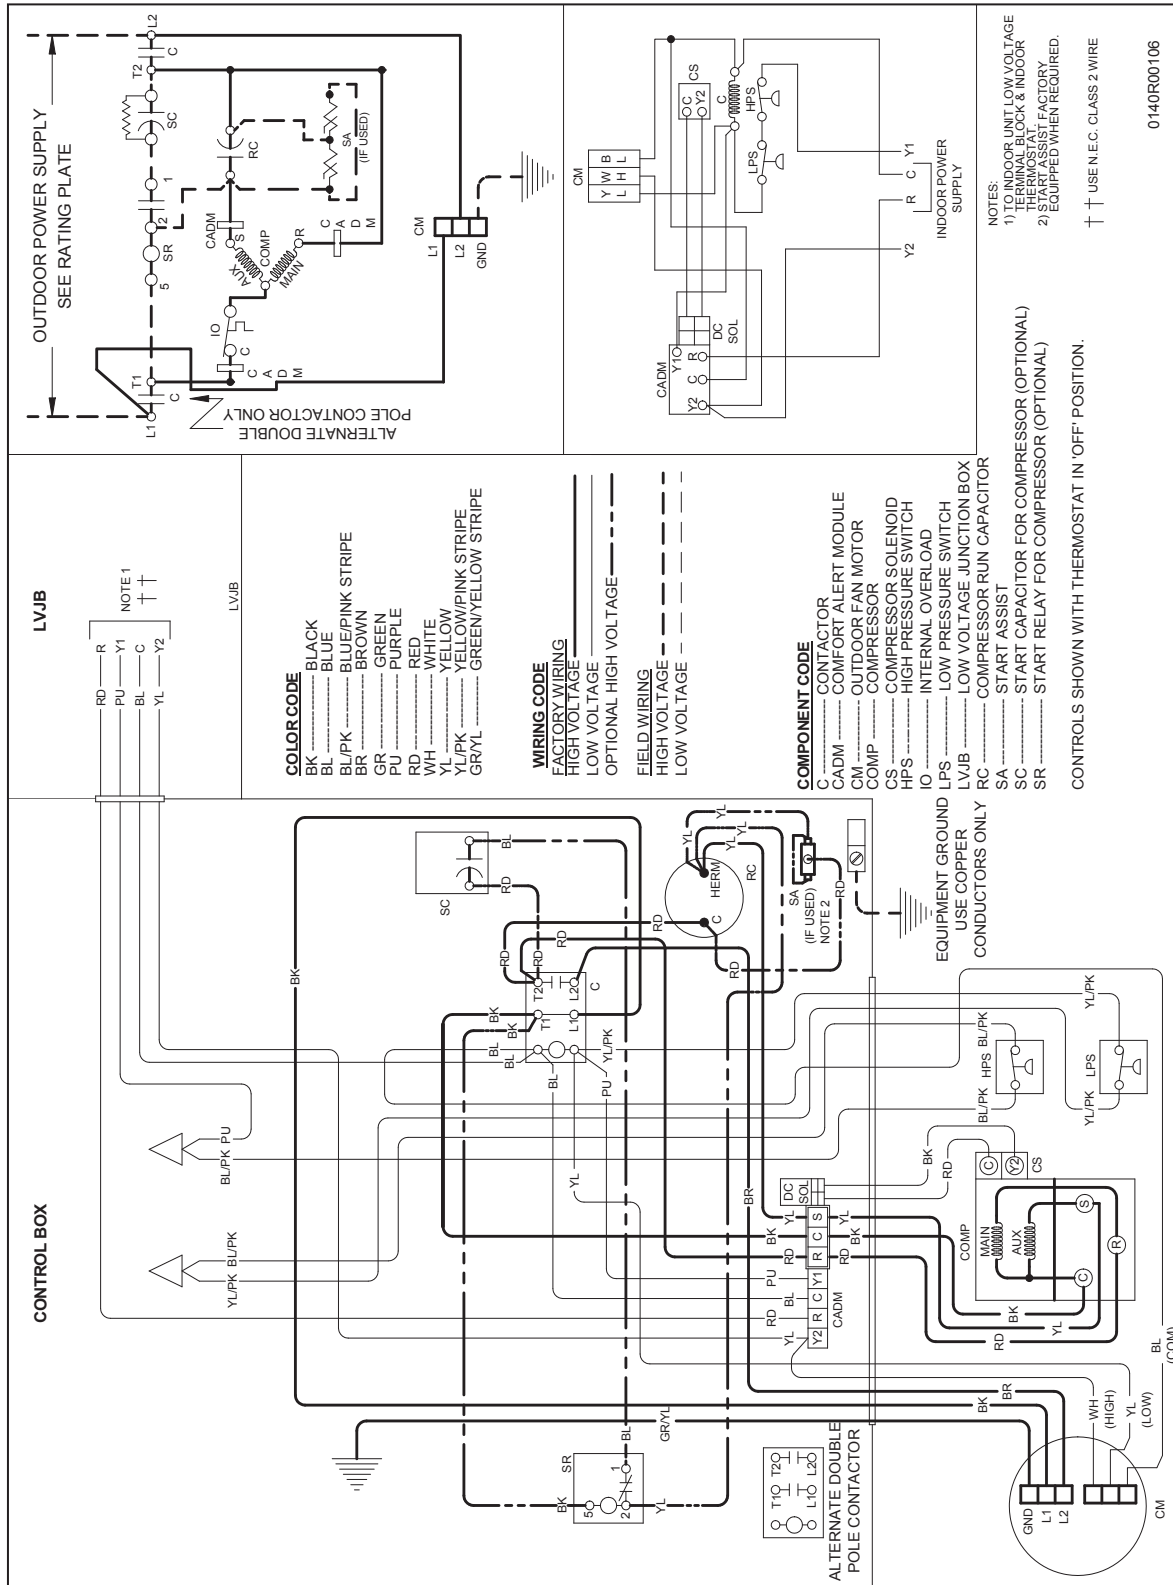

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.



WARNING

Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.

ACCESSORIES

MODEL	DESCRIPTION	DSX18 036*	DSX18 048*	DSX18 060*
ABK-20	Anchor Bracket Kit ▼	X	X	X
ASC-01	Anti-Short Cycle Kit	X	X	X
CSR-U-1	Hard-start Kit	X		
CSR-U-2	Hard-start Kit	X	X	X
CSR-U-3	Hard-start Kit		X	X
FSK01A ¹	Freeze Protection Kit	X	X	X
LSK01A	Liquid Line Solenoid Kit	X	X	X
OT18-60A	Outdoor Thermostat / Lockout Stat	X	X	X
TX2N4 ²	TXV Kit			
TX3N4 ²	TXV Kit	X		
TX5N4 ²	TXV Kit		X	X

▼ Contains 20 brackets; four brackets needed to anchor unit to pad

¹ Installed on indoor coil

² Field-installed, non-bleed, expansion valve kit — Condensing units and heat pumps with reciprocating compressors require the use of start-assist components when used in conjunction with an indoor coil using a non-bleed thermal expansion valve refrigerant metering device.

NOTES

PRODUCT SPECIFICATIONS

NOTES

