



Air Conditioning & Heating

PRODUCT SPECIFICATIONS



UP TO 18 SEER

R-410A

COOLING CAPACITY: 35,000 - 56,500 BTU/h

HEATING CAPACITY: 33,600 - 56,400 BTU/h



* To receive the Lifetime Compressor Limited Warranty and 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Québec. Full warranty details available at www.goodmanmfg.com.

DSZ18

SPLIT SYSTEM HEAT PUMP

The Goodman® brand DSZ18 Heat Pump uses the chlorine-free refrigerant R-410A and features energy efficiencies and operating sound levels that are among the best in the heating and cooling industry. Our quality manufacturing as well as easy installation and maintenance make this unit one of the best values on the market.

Standard Features

- R-410A chlorine-free refrigerant
- Two-Stage Copeland® UltraTech Scroll compressor
- High-density foam compressor cover
- Copeland ComfortAlert diagnostics
- Low-pressure switch
- Fully charged for 15' of tubing length
- Factory-installed bi-flow liquid line filter dryer
- Liquid refrigerant return protection
- Efficient condenser fan motor
- Copper tube, enhanced aluminum fin coil
- Sweat connection service valves with easy access to gauge ports
- AHRI Certified; ETL Listed

Cabinet Features

- Goodman brand sound control top design
- Wire fan discharge grille
- Steel louver coil guard
- Baked-on powder paint finish
- Rust-resistant coated screws
- Compact footprint
- Top and side maintenance access
- Single panel access to controls with space provided for field-installed accessories
- When properly anchored, meets the 2001 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)

Contents

Nomenclature.....	2
Product Specifications.....	3
Expanded Cooling Data.....	4
Expanded Heating Data.....	16
AHRI Performance Ratings.....	18
Dimensions.....	25
Wiring Diagram.....	26
Accessories	27



NOMENCLATURE

	D	S	Z	18	036	1	A	A	
	1	2	3	4,5	6,7,8	9	10	11	
Brand	D Goodman High-Feature Set, Two Stage						Engineering * Minor Revision		
Product Category	S Split System						Engineering * Major Revision		
Unit Type	X Condenser R-410A Z Heat Pump R-410A						Electrical		
							1	208/230 V, 1 Phase, 60 Hz	
							2	220/240 V, 1 Phase, 50 Hz	
							3	208/230 V, 3 Phase, 60 Hz	
							4	460 V, 3 Phase, 60 Hz	
							5	380/415 V, 3 Phase, 50 Hz	
Efficiency	13 13 SEER 14 14 SEER 16 16 SEER 18 18 SEER						Nominal Capacity		
							018	1½ Tons	048 4 Tons
							024	2 Tons	060 5 Tons
							030	2½ Tons	090 7½ tons
							036	3 Tons	120 10 Tons
							042	3½ Tons	
* Neither used for order entry or inventory management.									

Important EnergyStar Notice: EnergyStar ratings are dependent upon conditions beyond equipment installation. Proper sizing and installation of equipment is critical to achieve optimal performance. Split system air conditioners and heat pumps must be matched with appropriate coil components to meet EnergyStar criteria. Ask your contractor for details or visit www.energystar.gov.

SPECIFICATIONS

	DSZ18 0361A	DSZ18 0481A	DSZ18 0601A
COOLING CAPACITY			
Nominal Cooling (BTU/h)	35,000	47,000	57,000
Nominal Heating (BTU/h)	35,000	47,000	57,000
Decibels	72	73	75
COMPRESSOR			
RLA	16.6	21.1	25.6
LRA	82	96	118
CONDENSER FAN MOTOR			
Horsepower (RPM)	1/3	1/3	1/3
FLA	2.80	2.80	2.80
REFRIGERATION SYSTEM			
Liquid Valve Size ("O.D.)	3/8"	3/8"	3/8"
Suction Valve Size ("O.D.)	7/8"	1 1/8"	1 1/8"
Valve Connection Type	Sweat	Sweat	Sweat
Refrigerant Charge	188	278	278
Expansion Device	TXV	TXV	TXV
Superheat at Service Valve	5-7°F	5-7°F	5-7°F
Subcooling at Service Valve	8-10°F	8-10°F	8-10°F
ELECTRICAL DATA			
Voltage-Phase-Hz	208/230-1-60	208/230-1-60	208/230-1-60
Minimum Circuit Ampacity ¹	23.6	29.2	34.8
Max. Overcurrent Protection ²	40 amps	50 amps	60 amps
Min / Max Volts	197 / 253	197 / 253	197 / 253
Electrical Conduit Size	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"
SHIP WEIGHT (LBS)	285	330	350

¹ Wire size should be determined in accordance with National Electrical Codes; extensive wire runs will require larger wire sizes

² May use fuses or HACR type circuit breakers of the same size as noted

NOTES

- Always check the S&R plate for electrical data on the unit being installed.
- Installer will need to supply 7/8" to 1 1/8" adapters for suction line connections.
- Unit is charged with refrigerant for 15' of 3/8" liquid line. System charge must be adjusted per Installation Instructions Final Charge Procedure.
- Installation of these units requires the specified TXV Kit to be installed on the indoor coil. THE SPECIFIED TXV IS DETERMINED BY THE OUTDOOR UNIT NOT THE INDOOR COIL.

EXPANDED COOLING DATA — DSZ180361A* HIGH STAGE

IDB	OUTDOOR AMBIENT TEMPERATURE																								
	65°F			75°F			85°F			95°F			105°F			115°F									
	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71					
AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71					
MBh	34.5	35.8	39.2	-	33.7	34.9	38.3	-	32.9	34.1	37.4	-	32.1	33.3	36.5	-	30.5	31.6	34.6	-	28.3	29.3	32.1	-	
S/T	0.76	0.63	0.44	-	0.79	0.66	0.45	-	0.81	0.67	0.47	-	0.83	0.70	0.48	-	0.86	0.72	0.50	-	0.87	0.73	0.50	-	
ΔT	17	15	11	-	17	15	11	-	17	15	11	-	17	15	11	-	17	15	11	-	16	14	11	-	
1406	KW	2.10	2.14	2.21	-	2.26	2.31	2.39	-	2.41	2.47	2.55	-	2.54	2.60	2.69	-	2.65	2.71	2.81	-	2.75	2.81	2.91	-
Amps	7.8	8.0	8.2	-	8.4	8.6	8.9	-	9.2	9.4	9.7	-	9.8	10.1	10.4	-	10.5	10.7	11.1	-	11.1	11.4	11.8	-	
HiPR	219	235	249	-	245	264	279	-	279	300	317	-	318	342	361	-	358	385	406	-	395	425	449	-	
LoPR	107	114	124	-	113	120	131	-	117	125	136	-	123	131	143	-	129	137	150	-	134	142	155	-	
MBh	33.5	34.7	38.1	-	32.7	33.9	37.2	-	32.0	33.1	36.3	-	31.2	32.3	35.4	-	29.6	30.7	33.6	-	27.4	28.4	31.2	-	
S/T	0.72	0.60	0.42	-	0.75	0.63	0.43	-	0.77	0.64	0.44	-	0.79	0.66	0.46	-	0.82	0.69	0.48	-	0.83	0.69	0.48	-	
ΔT	18	15	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	17	15	11	-	
1250	KW	2.08	2.13	2.19	-	2.25	2.30	2.37	-	2.39	2.45	2.53	-	2.52	2.58	2.67	-	2.63	2.69	2.78	-	2.73	2.79	2.88	-
Amps	7.7	7.9	8.1	-	8.3	8.5	8.8	-	9.1	9.3	9.6	-	9.7	10.0	10.3	-	10.4	10.6	11.0	-	11.0	11.3	11.7	-	
HiPR	217	233	246	-	243	261	276	-	276	297	314	-	315	339	358	-	354	381	402	-	391	421	445	-	
LoPR	106	113	123	-	112	119	130	-	116	124	135	-	122	130	142	-	128	136	149	-	132	141	154	-	
MBh	30.9	32.1	35.1	-	30.2	31.3	34.3	-	29.5	30.6	33.5	-	28.8	29.8	32.7	-	27.3	28.3	31.0	-	25.3	26.2	28.8	-	
S/T	0.70	0.58	0.40	-	0.72	0.60	0.42	-	0.74	0.62	0.43	-	0.77	0.64	0.44	-	0.79	0.66	0.46	-	0.80	0.67	0.46	-	
ΔT	18	16	12	-	18	16	12	-	18	16	12	-	19	16	12	-	18	16	12	-	17	15	11	-	
1094	KW	2.03	2.07	2.14	-	2.19	2.24	2.31	-	2.33	2.38	2.46	-	2.46	2.51	2.60	-	2.56	2.62	2.71	-	2.66	2.72	2.81	-
Amps	7.5	7.7	7.9	-	8.1	8.3	8.6	-	8.8	9.0	9.3	-	9.4	9.7	10.0	-	10.1	10.3	10.7	-	10.7	10.9	11.3	-	
HiPR	210	226	239	-	236	254	268	-	268	288	305	-	305	329	347	-	343	370	390	-	379	408	431	-	
LoPR	103	109	119	-	108	115	126	-	113	120	131	-	118	126	138	-	124	132	144	-	128	137	149	-	

Shaded area is ACCA (TVA) conditions IDB: Entering Indoor Dry Bulb Temperature kW = Total system power Amps = outdoor unit amps (comp. +fan)
 High and low pressures are measured at the liquid and suction service valves. Design Subcooling 5 - 7 °F @ the liquid service valve, AHRI 95 test conditions

EXPANDED HEATING DATA — Low Stage

DSZ180361A* / CA*F3642C6A*+TXV/ MBE1600**-1

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	30.8	29.2	27.4	25.6	24.5	23.7	22.0	20.3	18.0	16.6	15.3	14.5	13.9	12.5	11.1	9.7	8.3	6.8
ΔT	33.5	31.8	29.9	27.9	26.7	25.9	24.0	22.1	19.6	18.1	16.7	15.8	15.2	13.6	12.1	10.5	9.0	7.4
kW	1.98	1.94	1.90	1.86	1.8	1.81	1.77	1.73	1.78	1.74	1.69	1.67	1.65	1.60	1.56	1.51	1.47	1.42
Amps	9.5	8.8	8.2	7.7	7.5	7.3	6.9	6.5	6.2	6.0	5.7	5.5	5.5	5.2	4.8	4.5	4.2	3.7
COP	4.54	4.39	4.23	4.04	3.91	3.83	3.64	3.44	2.96	2.81	2.65	2.54	2.48	2.28	2.08	1.87	1.64	1.39
EER	15.5	15.0	14.4	13.8	13.4	13.1	12.4	11.7	10.1	9.6	9.1	8.7	8.5	7.8	7.1	6.4	5.6	4.7
HI PR	393	377	362	346	338	332	319	306	293	280	269	262	258	248	238	229	221	213
LO PR	145	134	126	116	109	105	97	86	78	69	61	57	55	46	40	34	29	23

DSZ180481A* / CA*F4860*6A*+TXV/ MBE2000**-1

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	43.8	41.4	39.0	36.5	34.8	33.7	31.3	28.9	27.0	25.0	23.0	21.7	20.9	18.7	16.6	14.5	12.4	10.1
ΔT	33.8	32.0	30.1	28.1	26.9	26.0	24.2	22.3	20.9	19.3	17.7	16.7	16.1	14.5	12.8	11.2	9.5	7.8
kW	2.67	2.62	2.56	2.50	2.5	2.44	2.39	2.33	2.44	2.38	2.32	2.28	2.26	2.19	2.13	2.07	2.01	1.95
Amps	12.7	11.7	10.9	10.2	9.8	9.6	9.0	8.5	8.1	7.7	7.2	7.0	6.9	6.5	6.0	5.6	5.1	4.5
COP	4.79	4.63	4.46	4.27	4.13	4.04	3.84	3.63	3.24	3.07	2.90	2.78	2.71	2.50	2.28	2.05	1.80	1.52
EER	16.4	15.8	15.2	14.6	14.1	13.8	13.1	12.4	11.1	10.5	9.9	9.5	9.3	8.5	7.8	7.0	6.2	5.2
HI PR	391	375	360	344	336	330	317	304	292	278	267	261	256	247	237	227	219	212
LO PR	145	134	126	115	109	105	97	86	78	69	61	57	55	46	40	34	29	23

DSZ180601A* / CA*F4860*6A*+TXV/ MBE2000**-1

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	52.0	49.2	46.3	43.3	41.4	40.1	37.2	34.3	32.6	30.1	27.7	26.1	25.2	22.6	20.0	17.5	14.9	12.2
ΔT	40.1	38.0	35.7	33.4	31.9	30.9	28.7	26.5	25.1	23.2	21.4	20.2	19.4	17.4	15.5	13.5	11.5	9.4
kW	3.66	3.58	3.50	3.42	3.4	3.34	3.26	3.18	3.23	3.15	3.06	3.01	2.98	2.90	2.81	2.73	2.65	2.57
Amps	17.5	16.2	15.1	14.2	13.6	13.4	12.6	11.9	11.3	10.8	10.3	10.0	9.8	9.3	8.6	8.1	7.4	6.6
COP	4.16	4.02	3.87	3.71	3.59	3.51	3.34	3.16	2.95	2.80	2.64	2.54	2.47	2.28	2.08	1.87	1.65	1.39
EER	14.2	13.7	13.2	12.7	12.3	12.0	11.4	10.8	10.1	9.6	9.0	8.7	8.4	7.8	7.1	6.4	5.6	4.8
HI PR	421	403	388	371	362	355	341	328	314	300	288	281	276	265	255	245	236	228
LO PR	138	128	120	110	104	100	92	82	74	66	58	54	52	44	38	32	28	22

High pressure is measured at the suction service valve (the larger valve).
 Low pressure is measured at the gauge port connection.
 Calculations are based on nominal CFM and 70 °F indoor dry bulb.

Amps = Outdoor unit amps (comp.+fan)
 kW = Total system power

EXPANDED HEATING DATA — HIGH STAGE

DSZ180361A* / CA*F3642C6A*+TXV/ MBE1600-1**

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	44.5	42.2	39.7	37.1	35.4	34.3	31.9	29.4	27.5	25.4	23.4	22.0	21.2	19.1	16.9	14.7	12.6	10.3
ΔT	33.0	31.2	29.4	27.5	26.2	25.4	23.6	21.8	20.4	18.8	17.3	16.3	15.7	14.1	12.5	10.9	9.3	7.6
kW	2.81	2.75	2.69	2.63	2.6	2.57	2.52	2.46	2.43	2.37	2.32	2.28	2.26	2.20	2.14	2.08	2.02	1.97
Amps	12.8	11.8	11.1	10.4	10.0	9.8	9.2	8.7	8.3	8.0	7.6	7.4	7.3	6.9	6.4	6.0	5.5	4.9
COP	4.64	4.49	4.32	4.12	3.99	3.90	3.71	3.50	3.30	3.13	2.95	2.83	2.75	2.54	2.31	2.07	1.82	1.53
EER	15.9	15.3	14.8	14.1	13.6	13.3	12.7	12.0	11.3	10.7	10.1	9.7	9.4	8.7	7.9	7.1	6.2	5.2
HI PR	400	383	369	352	344	338	324	311	298	285	274	267	262	252	243	233	224	216
LO PR	143	132	124	114	108	104	95	85	77	68	60	56	54	46	39	33	29	23

DSZ180481A* / CA*F4860*6A*+TXV/ MBE2000-1**

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	62.2	58.9	55.4	51.8	49.5	48.0	44.6	41.1	38.9	35.9	33.0	31.2	30.0	27.0	23.9	20.8	17.8	14.6
ΔT	32.9	31.2	29.3	27.4	26.2	25.4	23.6	21.7	20.6	19.0	17.5	16.5	15.9	14.3	12.6	11.0	9.4	7.7
kW	3.80	3.72	3.64	3.56	3.5	3.49	3.41	3.33	3.28	3.20	3.12	3.07	3.04	2.96	2.89	2.81	2.73	2.66
Amps	17.0	15.7	14.7	13.8	13.2	13.0	12.2	11.5	11.0	10.5	10.0	9.7	9.6	9.1	8.4	7.9	7.2	6.4
COP	4.80	4.64	4.46	4.26	4.12	4.03	3.82	3.61	3.47	3.29	3.10	2.97	2.89	2.66	2.42	2.17	1.90	1.61
EER	16.4	15.8	15.2	14.5	14.1	13.8	13.1	12.3	11.9	11.2	10.6	10.2	9.9	9.1	8.3	7.4	6.5	5.5
HI PR	398	382	367	351	343	336	323	310	297	284	272	266	261	251	241	232	223	215
LO PR	137	127	119	109	103	99	91	81	73	65	57	53	51	44	38	32	28	22

DSZ180601A* / CA*F4860*6A*+TXV/ MBE2000-1**

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	71.6	67.8	63.8	59.7	57.0	55.2	51.3	47.3	46.7	43.1	39.7	37.5	36.1	32.4	28.7	25.0	21.4	17.5
ΔT	37.9	35.9	33.8	31.6	30.2	29.2	27.1	25.0	24.7	22.8	21.0	19.8	19.1	17.1	15.2	13.2	11.3	9.3
kW	4.94	4.84	4.73	4.63	4.6	4.52	4.42	4.32	4.28	4.17	4.07	4.00	3.96	3.85	3.75	3.65	3.54	3.44
Amps	24.5	22.1	20.2	18.6	17.6	17.1	15.7	14.5	13.6	12.6	11.7	11.2	10.9	10.0	8.8	7.9	6.7	5.3
COP	4.24	4.10	3.95	3.77	3.65	3.57	3.40	3.21	3.19	3.02	2.86	2.74	2.66	2.46	2.24	2.01	1.77	1.49
EER	14.5	14.0	13.5	12.9	12.5	12.2	11.6	11.0	10.9	10.3	9.8	9.4	9.1	8.4	7.7	6.9	6.0	5.1
HI PR	421	403	388	371	362	355	342	328	314	300	288	281	276	265	255	245	236	228
LO PR	127	118	111	102	96	92	85	76	68	61	54	50	48	41	35	30	26	20

High pressure is measured at the suction service valve (the larger valve).
 Low pressure is measured at the gauge port connection.
 Calculations are based on nominal CFM and 70 °F indoor dry bulb.

Amps = Outdoor unit amps (comp.+fan)
 kW = Total system power

AHRI PERFORMANCE RATINGS

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				TVA RATINGS ³		HEATING CAPACITY			AHRI #
	COILS & AIR HANDLERS	FURNACE/BLOWER	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	HIGH	HSPF ⁴	LOW	
DSZ18 0361A*	AEPF313716A*+TXV		35,000	26,600	18	13	32,400	26,200	35,000	9.25	20,400	3407448
	AEPF426016C*+TXV		35,000	26,600	18	13	32,400	26,200	35,000	9.25	20,400	3407449
	CA*F3743*6A*+TXV	MBE1600**-1B*	35,000	26,600	18	13	32,400	26,200	35,000	9.5	20,400	3407450
	CA*F3743*6A*+TXV	MBE2000**-1B*	35,000	26,600	18	13	32,400	26,200	35,000	9.25	20,400	3407451
	CA*F3743*6A*+TXV	MBVC1600**-1A*	35,000	26,600	18	13	32,400	26,200	35,000	9.5	20,400	3609949
	CA*F3743*6A*+TXV	MBVC2000**-1A*	35,000	26,600	18	13	32,400	26,200	35,000	9.25	20,400	3609954
	CA*F3743*6A*+TXV	A*V80704B**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3407452
	CA*F3743*6A*+TXV	A*V80905C**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3407453
	CA*F3743*6A*+TXV	A*V81155C**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3407454
	CA*F3743*6A*+TXV	G*V95453B**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3407455
	CA*F3743*6A*+TXV	G*V950704C**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3407456
	CA*F3743*6A*+TXV	G*V950905D**	35,000	26,600	18	13	32,400	26,200	35,000	9.25	20,400	3407457
	CA*F3743*6A*+TXV	G*V951155D**	35,000	26,600	18	13	32,400	26,200	35,000	9.25	20,400	3407458
	CA*F3743*6A*+TXV	G*VC950453BXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3599216
	CA*F3743*6A*+TXV	G*VC950704CXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3599299
	CA*F3743*6A*+TXV	G*VC950905DXA*	35,000	26,600	18	13	32,400	26,200	35,000	9.25	20,400	3599351
	CA*F3743*6A*+TXV	G*VC951155DXA*	35,000	26,600	18	13	32,400	26,200	35,000	9.25	20,400	3599501
	CA*F3743*6A*+TXV	G*V90704C**	34,000	25,800	17	12	31,500	25,500	34,000	9	20,000	3606053
	CA*F3743*6A*+TXV	G*V90905D**	35,000	26,600	17.5	13	32,400	26,200	34,000	9	20,400	3606054
	CA*F3743*6A*+TXV	G*V91155D**	35,000	26,600	17.5	13	32,400	26,200	35,000	9	20,400	3606055
	CA*F3743*6A*+TXV	G*V80704B**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3606610
	CA*F3743*6A*+TXV	G*V80905C**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3606611
	CA*F3743*6A*+TXV	G*V81155C**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3606612
	CA*F3743*6A*+TXV	A*VC80704BXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3629738
	CA*F3743*6A*+TXV	A*VC80905CXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3629743
	CA*F3743*6A*+TXV	G*VC80704BXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3629751
	CA*F3743*6A*+TXV	G*VC80905CXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3629757
	CA*F3743*6A*+TXV	A*VC81155CXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3643013
	CA*F3743*6A*+TXV	G*VC81155CXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3643020
	CA*F4860*6B*+TXV	A*V80905C**	35,000	26,600	17.5	12.5	32,400	26,200	35,000	9.25	20,000	3407459
	CA*F4860*6B*+TXV	G*V90704C**	35,000	26,600	17	11.5	32,400	26,200	34,000	9.3	20,000	3606056
	CA*F4860*6B*+TXV	G*V950704C**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3606057
	CA*F4860*6B*+TXV	A*VC80905CXA*	35,000	26,600	17.5	12.5	32,400	26,200	35,000	9.25	20,000	3629773
	CA*F4961*6A*+TXV	MBE1600**-1B*	35,000	26,600	18	13	32,400	26,200	35,000	9.5	20,000	3407460
	CA*F4961*6A*+TXV	MBE2000**-1B*	35,000	26,600	18	13	32,400	26,200	35,000	9.25	20,400	3407461
	CA*F4961*6A*+TXV	MBVC1600**-1A*	35,000	26,600	18	13	32,400	26,200	35,000	9.5	20,000	3609969
	CA*F4961*6A*+TXV	MBVC2000**-1A*	35,000	26,600	18	13	32,400	26,200	35,000	9.25	20,400	3609984
	CA*F4961*6A*+TXV	A*V80704B**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3407462
	CA*F4961*6A*+TXV	A*V80905C**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3407463
	CA*F4961*6A*+TXV	A*V81155C**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3407464
CA*F4961*6A*+TXV	G*V95453B**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3407465	
CA*F4961*6A*+TXV	G*V950704C**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3407466	
CA*F4961*6A*+TXV	G*V950905D**	35,000	26,600	18	13	32,400	26,200	35,000	9.25	20,000	3407467	
CA*F4961*6A*+TXV	G*V951155D**	35,000	26,600	18	13	32,400	26,200	35,000	9.25	20,000	3407468	
CA*F4961*6A*+TXV	G*VC950453BXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3599217	

See Notes on Page 24.

AHRI PERFORMANCE RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				TVA RATINGS ³		HEATING CAPACITY			AHRI #
	COILS & AIR HANDLERS	FURNACE/BLOWER	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	HIGH	HSPF ⁴	LOW	
DSZ18 0361A* (cont.)	CA*F4961*6A*+TXV	G*VC950704CXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3599300
	CA*F4961*6A*+TXV	G*VC950905DXA*	35,000	26,600	18	13	32,400	26,200	35,000	9.25	20,000	3599360
	CA*F4961*6A*+TXV	G*VC951155DXA*	35,000	26,600	18	13	32,400	26,200	35,000	9.25	20,000	3599510
	CA*F4961*6A*+TXV	G*V90704C**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3606058
	CA*F4961*6A*+TXV	G*V90905D**	35,000	26,600	17.5	13	32,400	26,200	35,000	9.25	20,000	3606059
	CA*F4961*6A*+TXV	G*V91155D**	35,000	26,600	17.5	13	32,400	26,200	35,000	9.25	20,000	3606060
	CA*F4961*6A*+TXV	G*V80704B**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3606613
	CA*F4961*6A*+TXV	G*V80905C**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3606614
	CA*F4961*6A*+TXV	G*V81155C**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3606615
	CA*F4961*6A*+TXV	A*VC80704BXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3629739
	CA*F4961*6A*+TXV	A*VC80905CXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3629744
	CA*F4961*6A*+TXV	G*VC80704BXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3629752
	CA*F4961*6A*+TXV	G*VC80905CXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3629758
	CA*F4961*6A*+TXV	A*VC81155CXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3643014
	CA*F4961*6A*+TXV	G*VC81155CXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3643021
	CHPF3743C6A*+TXV	MBE1600*-1B*	35,000	26,600	18	13	32,400	26,200	35,000	9.5	20,400	3407469
	CHPF3743C6A*+TXV	A*V80704B**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3407470
	CHPF3743C6A*+TXV	A*V80905C**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3407471
	CHPF3743C6A*+TXV	A*V81155C**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3407472
	CHPF3743C6A*+TXV	G*V95453B**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3407473
	CHPF3743C6A*+TXV	G*V950704C**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3407474
	CHPF3743C6A*+TXV	G*VC950453BXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3599218
	CHPF3743C6A*+TXV	G*VC950704CXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3599301
	CHPF3743C6A*+TXV	G*V80704B**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3606616
	CHPF3743C6A*+TXV	G*V80905C**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3606617
	CHPF3743C6A*+TXV	G*V81155C**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3606618
	CHPF3743C6A*+TXV	G*VC80704BXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3629753
	CHPF3743C6A*+TXV	G*VC80905CXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3629759
	CHPF3743C6A*+TXV	G*VC81155CXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3643022
	CHPF3743C6B*+TXV	MBE1600*-1B*	35,000	26,600	18	13	32,400	26,200	35,000	9.5	20,400	3407475
	CHPF3743C6B*+TXV	MBVC1600**-1A*	35,000	26,600	18	13	32,400	26,200	35,000	9.5	20,400	3610021
	CHPF3743C6B*+TXV	A*V80704B**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3407476
	CHPF3743C6B*+TXV	A*V80905C**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3407477
	CHPF3743C6B*+TXV	A*V81155C**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3407478
	CHPF3743C6B*+TXV	G*V95453B**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3407479
	CHPF3743C6B*+TXV	G*V950704C**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3407480
	CHPF3743C6B*+TXV	G*VC950453BXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3599219
	CHPF3743C6B*+TXV	G*VC950704CXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3599302
	CHPF3743C6B*+TXV	G*V80704B**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3606619
	CHPF3743C6B*+TXV	G*V80905C**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3606620
CHPF3743C6B*+TXV	G*V81155C**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3606621	
CHPF3743C6B*+TXV	A*VC80704BXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3629740	
CHPF3743C6B*+TXV	A*VC80905CXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3629745	
CHPF3743C6B*+TXV	G*VC80704BXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3629754	
CHPF3743C6B*+TXV	G*VC80905CXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3629760	

See Notes on Page 24.

AHRI PERFORMANCE RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				TVA RATINGS ³		HEATING CAPACITY			AHRI #
	COILS & AIR HANDLERS	FURNACE/BLOWER	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	HIGH	HSPF ⁴	LOW	
DSZ18 0361A* (cont.)	CHPF3743C6B*+TXV	A*VC81155CXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3643015
	CHPF3743C6B*+TXV	G*VC81155CXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3643023
	CHPF3743D6A*+TXV	MBE2000** -1B*	35,000	26,600	18	13	32,400	26,200	35,000	9.25	20,000	3407481
	CHPF3743D6A*+TXV	A*V80905C**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3407482
	CHPF3743D6A*+TXV	A*V81155C**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3407483
	CHPF3743D6A*+TXV	G*V950704C**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3407484
	CHPF3743D6A*+TXV	G*V950905D**	35,000	26,600	18	13	32,400	26,200	35,000	9.25	20,400	3407485
	CHPF3743D6A*+TXV	G*V951155D**	35,000	26,600	18	13	32,400	26,200	35,000	9.25	20,000	3407486
	CHPF3743D6A*+TXV	G*VC950704CXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3599303
	CHPF3743D6A*+TXV	G*VC950905DXA*	35,000	26,600	18	13	32,400	26,200	35,000	9.25	20,400	3599361
	CHPF3743D6A*+TXV	G*VC951155DXA*	35,000	26,600	18	13	32,400	26,200	35,000	9.25	20,000	3599511
	CHPF3743D6A*+TXV	G*V80905C**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3606622
	CHPF3743D6A*+TXV	G*V81155C**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3606623
	CHPF3743D6A*+TXV	G*VC80905CXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3629761
	CHPF3743D6A*+TXV	G*VC81155CXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3643024
	CHPF3743D6B*+TXV	MBE2000** -1B*	35,000	26,600	18	13	32,400	26,200	35,000	9.25	20,000	3407487
	CHPF3743D6B*+TXV	MBVC2000** -1A*	35,000	26,600	18	13	32,400	26,200	35,000	9.25	20,000	3610028
	CHPF3743D6B*+TXV	A*V80905C**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3407488
	CHPF3743D6B*+TXV	A*V81155C**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3407489
	CHPF3743D6B*+TXV	G*V950704C**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3407490
	CHPF3743D6B*+TXV	G*V950905D**	35,000	26,600	18	13	32,400	26,200	35,000	9.25	20,400	3407491
	CHPF3743D6B*+TXV	G*V951155D**	35,000	26,600	18	13	32,400	26,200	35,000	9.25	20,000	3407492
	CHPF3743D6B*+TXV	G*VC950704CXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3599304
	CHPF3743D6B*+TXV	G*VC950905DXA*	35,000	26,600	18	13	32,400	26,200	35,000	9.25	20,400	3599362
	CHPF3743D6B*+TXV	G*VC951155DXA*	35,000	26,600	18	13	32,400	26,200	35,000	9.25	20,000	3599512
	CHPF3743D6B*+TXV	G*V80905C**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3606624
	CHPF3743D6B*+TXV	G*V81155C**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3606625
	CHPF3743D6B*+TXV	A*VC80905CXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3629746
	CHPF3743D6B*+TXV	G*VC80905CXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3629762
	CHPF3743D6B*+TXV	A*VC81155CXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3643016
	CHPF3743D6B*+TXV	G*VC81155CXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3643025
	CHPF4860D6C*+TXV	MBE2000** -1B*	35,000	26,600	18	13	32,400	26,200	35,000	9.25	20,000	3407493
	CHPF4860D6C*+TXV	A*V80905C**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3407494
	CHPF4860D6C*+TXV	A*V81155C**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3407495
	CHPF4860D6C*+TXV	G*V950704C**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3407496
	CHPF4860D6C*+TXV	G*V950905D**	35,000	26,600	18	13	32,400	26,200	35,000	9.25	20,000	3407497
	CHPF4860D6C*+TXV	G*V951155D**	35,000	26,600	18	13	32,400	26,200	35,000	9.25	20,000	3407498
	CHPF4860D6C*+TXV	G*VC950704CXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3599305
	CHPF4860D6C*+TXV	G*VC950905DXA*	35,000	26,600	18	13	32,400	26,200	35,000	9.25	20,000	3599363
	CHPF4860D6C*+TXV	G*VC951155DXA*	35,000	26,600	18	13	32,400	26,200	35,000	9.25	20,000	3599513
CHPF4860D6C*+TXV	G*V80905C**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3606626	
CHPF4860D6C*+TXV	G*V81155C**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3606627	
CHPF4860D6C*+TXV	G*VC80905CXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3629763	
CHPF4860D6C*+TXV	G*VC81155CXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3643026	
CHPF4860D6D*+TXV	MBE2000** -1B*	35,000	26,600	18	13	32,400	26,200	35,000	9.25	20,000	3407499	

See Notes on Page 24.

AHRI PERFORMANCE RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				TVA RATINGS ³		HEATING CAPACITY			AHRI #
	COILS & AIR HANDLERS	FURNACE/BLOWER	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	HIGH	HSPF ⁴	LOW	
DSZ18 0361A* (cont.)	CHPF4860D6D*+TXV	MBVC2000**-1A*	35,000	26,600	18	13	32,400	26,200	35,000	9.25	20,000	3610044
	CHPF4860D6D*+TXV	A*V80905C**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3407500
	CHPF4860D6D*+TXV	A*V81155C**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3407501
	CHPF4860D6D*+TXV	G*V950704C**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3407502
	CHPF4860D6D*+TXV	G*V950905D**	35,000	26,600	18	13	32,400	26,200	35,000	9.25	20,000	3407503
	CHPF4860D6D*+TXV	G*V951155D**	35,000	26,600	18	13	32,400	26,200	35,000	9.25	20,000	3407504
	CHPF4860D6D*+TXV	G*VC950704CXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3599306
	CHPF4860D6D*+TXV	G*VC950905DXA*	35,000	26,600	18	13	32,400	26,200	35,000	9.25	20,000	3599364
	CHPF4860D6D*+TXV	G*VC951155DXA*	35,000	26,600	18	13	32,400	26,200	35,000	9.25	20,000	3599514
	CHPF4860D6D*+TXV	G*V80905C**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3606628
	CHPF4860D6D*+TXV	G*V81155C**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3606629
	CHPF4860D6D*+TXV	A*VC80905CXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3629747
	CHPF4860D6D*+TXV	G*VC80905CXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3629764
	CHPF4860D6D*+TXV	A*VC81155CXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3643017
	CHPF4860D6D*+TXV	G*VC81155CXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3643027
	CHTF3743C6A*+TXV	MBE1600**-1B*	34,600	26,300	18	13	32,000	25,900	35,000	9.5	20,400	3407505
	CHTF3743C6A*+TXV	MBVC1600**-1A*	34,600	26,300	18	13	32,000	25,900	35,000	9.5	20,400	3610065
	CHTF3743D6A*+TXV	MBE2000**-1B*	34,600	26,300	18	13	32,000	25,900	35,000	9.2	20,000	3407506
	CHTF3743D6A*+TXV	MBVC2000**-1A*	34,600	26,300	18	13	32,000	25,900	35,000	9.2	20,000	3610068
	CHTF4860D6A*+TXV	MBE2000**-1B*	35,000	26,600	18	13	32,400	26,200	35,000	9.2	20,000	3407507
	CHTF4860D6A*+TXV	MBVC2000**-1A*	35,000	26,600	18	13	32,400	26,200	35,000	9.2	20,000	3610071
	CSCF3642N6C*+TXV	MBE1600**-1B*	35,000	26,600	18	13	32,400	26,200	35,000	9.5	20,400	3407591
	CSCF3642N6C*+TXV	MBVC1600**-1A*	35,000	26,600	18	13	32,400	26,200	35,000	9.5	20,400	3610075
	CSCF3642N6C*+TXV	A*V80704B**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3407508
	CSCF3642N6C*+TXV	A*V80905C**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3407509
	CSCF3642N6C*+TXV	A*V81155C**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3407510
	CSCF3642N6C*+TXV	G*V95453B**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3407511
	CSCF3642N6C*+TXV	G*V950704C**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3407512
	CSCF3642N6C*+TXV	G*V950905D**	35,000	26,600	18	13	32,400	26,200	35,000	9.25	20,400	3407513
	CSCF3642N6C*+TXV	G*V951155D**	35,000	26,600	18	13	32,400	26,200	35,000	9.25	20,400	3407514
	CSCF3642N6C*+TXV	G*VC950453BXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3599220
	CSCF3642N6C*+TXV	G*VC950704CXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3599307
	CSCF3642N6C*+TXV	G*VC950905DXA*	35,000	26,600	18	13	32,400	26,200	35,000	9.25	20,400	3599352
	CSCF3642N6C*+TXV	G*VC951155DXA*	35,000	26,600	18	13	32,400	26,200	35,000	9.25	20,400	3599502
	CSCF3642N6C*+TXV	G*V80704B**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3606630
	CSCF3642N6C*+TXV	G*V80905C**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3606631
	CSCF3642N6C*+TXV	G*V81155C**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3606632
	CSCF3642N6C*+TXV	A*VC80704BXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3629741
	CSCF3642N6C*+TXV	A*VC80905CXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3629748
	CSCF3642N6C*+TXV	G*VC80704BXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3629755
CSCF3642N6C*+TXV	G*VC80905CXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3629765	
CSCF3642N6C*+TXV	A*VC81155CXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3643018	
CSCF3642N6C*+TXV	G*VC81155CXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3643028	
CSCF4860N6C*+TXV	A*V80704B**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3407515	
CSCF4860N6C*+TXV	A*V80905C**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3407516	

See Notes on Page 24.

AHRI PERFORMANCE RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				TVA RATINGS ³		HEATING CAPACITY			AHRI #
	COILS & AIR HANDLERS	FURNACE/BLOWER	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	HIGH	HSPF ⁴	LOW	
DSZ18 0361A* (cont.)	CSCF4860N6C*+TXV	A*V81155C**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3407517
	CSCF4860N6C*+TXV	G*V95453B**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3407518
	CSCF4860N6C*+TXV	G*V950704C**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3407519
	CSCF4860N6C*+TXV	G*V950905D**	35,000	26,600	18	13	32,400	26,200	35,000	9.25	20,000	3407520
	CSCF4860N6C*+TXV	G*V951155D**	35,000	26,600	18	13	32,400	26,200	35,000	9.25	20,000	3407521
	CSCF4860N6C*+TXV	G*VC950453BXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3599221
	CSCF4860N6C*+TXV	G*VC950704CXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3599308
	CSCF4860N6C*+TXV	G*VC950905DXA*	35,000	26,600	18	13	32,400	26,200	35,000	9.25	20,000	3599365
	CSCF4860N6C*+TXV	G*VC951155DXA*	35,000	26,600	18	13	32,400	26,200	35,000	9.25	20,000	3599515
	CSCF4860N6C*+TXV	G*V80704B**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3606633
	CSCF4860N6C*+TXV	G*V80905C**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3606634
	CSCF4860N6C*+TXV	G*V81155C**	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3606635
	CSCF4860N6C*+TXV	A*VC80704BXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3629742
	CSCF4860N6C*+TXV	A*VC80905CXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3629749
	CSCF4860N6C*+TXV	G*VC80704BXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3629756
	CSCF4860N6C*+TXV	G*VC80905CXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3629766
	CSCF4860N6C*+TXV	A*VC81155CXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3643019
	CSCF4860N6C*+TXV	G*VC81155CXA*	34,600	26,300	17.5	12.5	32,000	25,900	35,000	9.25	20,000	3643029
	CT*F3642*6A*+TXV	MBE1600**-1B*	34,600	26,300	18	13	32,000	25,900	35,000	9.5	20,400	3407522
	CT*F3642*6A*+TXV	MBVC1600**-1A*	34,600	26,300	18	13	32,000	25,900	35,000	9.5	20,400	3610111
CT*F4860*6A*+TXV	MBE1600**-1B*	35,000	26,600	18	13	32,400	26,200	35,000	9.5	20,000	3407592	
CT*F4860*6A*+TXV	MBE2000**-1B*	35,000	26,600	18	13	32,400	26,200	35,000	9.25	20,000	3407523	
CT*F4860*6A*+TXV	MBVC1600**-1A*	35,000	26,600	18	13	32,400	26,200	35,000	9.5	20,000	3610120	
CT*F4860*6A*+TXV	MBVC2000**-1A*	35,000	26,600	18	13	32,400	26,200	35,000	9.25	20,000	3610141	
DSZ18 0481A*	AEPF426016C*+TXV		47,000	35,300	17.5	12.5	43,500	34,800	47,000	9.25	29,000	3407524
	CA*F4961*6A*+TXV	MBE1600**-1B*	47,000	35,300	17.5	12.5	43,500	34,800	47,000	9.25	29,000	3407525
	CA*F4961*6A*+TXV	MBE2000**-1B*	47,500	35,600	18	13	43,900	35,100	47,500	9.5	29,600	3407526
	CA*F4961*6A*+TXV	MBVC1600**-1A*	47,000	35,300	17.5	12.5	43,500	34,800	47,000	9.25	29,000	3609970
	CA*F4961*6A*+TXV	MBVC2000**-1A*	47,500	35,600	18	13	43,900	35,100	47,500	9.5	29,600	3609985
	CA*F4961*6A*+TXV	A*V80905C**	47,000	35,300	17.5	12.5	43,500	34,800	47,000	9.25	29,000	3407527
	CA*F4961*6A*+TXV	A*V81155C**	47,000	35,300	17.5	12.5	43,500	34,800	47,000	9.25	29,000	3407528
	CA*F4961*6A*+TXV	G*V950704C**	47,000	35,300	17.5	12.5	43,500	34,800	47,000	9.25	29,000	3407529
	CA*F4961*6A*+TXV	G*V950905D**	47,000	35,300	17.5	12.5	43,500	34,800	47,000	9.25	29,000	3407530
	CA*F4961*6A*+TXV	G*V951155D**	47,000	35,300	17.75	12.5	43,500	34,800	47,000	9.25	29,000	3407531
	CA*F4961*6A*+TXV	G*VC950704CXA*	47,000	35,300	17.5	12.5	43,500	34,800	47,000	9.25	29,000	3599316
	CA*F4961*6A*+TXV	G*VC950905DXA*	47,000	35,300	17.5	12.5	43,500	34,800	47,000	9.25	29,000	3599440
	CA*F4961*6A*+TXV	G*VC951155DXA*	47,000	35,300	17.75	12.5	43,500	34,800	47,000	9.25	29,000	3599599
	CA*F4961*6A*+TXV	G*V90704C**	47,000	35,300	17	12.5	43,500	34,800	47,000	9	29,000	3606061
	CA*F4961*6A*+TXV	G*V90905D**	47,000	35,300	16.5	12.2	43,500	34,800	47,000	9	29,000	3606062
	CA*F4961*6A*+TXV	G*V91155D**	47,000	35,300	17.5	12.5	43,500	34,800	47,000	9	29,000	3606063
	CA*F4961*6A*+TXV	G*V80905C**	47,000	35,300	17.5	12.5	43,500	34,800	47,000	9.25	29,000	3606636
	CA*F4961*6A*+TXV	G*V81155C**	47,000	35,300	17.5	12.5	43,500	34,800	47,000	9.25	29,000	3606637
	CA*F4961*6A*+TXV	A*VC80905CXA*	47,000	35,300	17	12.2	43,500	34,800	47,000	9.25	29,000	3643035
	CA*F4961*6A*+TXV	G*VC80905CXA*	47,000	35,300	17	12.2	43,500	34,800	47,000	9.25	29,000	3643038
CHPF4860D6C*+TXV	MBE2000**-1B*	47,500	35,600	18	13	43,900	35,100	47,500	9.5	29,600	3407532	

See Notes on Page 24.

AHRI PERFORMANCE RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				TVA RATINGS ³		HEATING CAPACITY			AHRI #
	COILS & AIR HANDLERS	FURNACE/BLOWER	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	HIGH	HSPF ⁴	LOW	
DSZ18 0481A* (cont.)	CHPF4860D6C*+TXV	A*V80905C**	47,000	35,300	17.5	12.5	43,500	34,800	47,000	9.25	29,000	3407533
	CHPF4860D6C*+TXV	A*V81155C**	47,000	35,300	17.5	12.5	43,500	34,800	47,000	9.25	29,000	3407534
	CHPF4860D6C*+TXV	A*V90704C**	47,000	35,300	17.5	12.5	43,500	34,800	47,000	9.25	29,000	3407535
	CHPF4860D6C*+TXV	A*V90905D**	47,000	35,300	17.5	12.5	43,500	34,800	47,000	9.25	29,000	3407536
	CHPF4860D6C*+TXV	A*V91155D**	47,000	35,300	17.75	12.5	43,500	34,800	47,000	9.25	29,000	3407537
	CHPF4860D6C*+TXV	A*VC90704CXA*	47,000	35,300	17.5	12.5	43,500	34,800	47,000	9.25	29,000	3598992
	CHPF4860D6C*+TXV	A*VC90905DXA*	47,000	35,300	17.5	12.5	43,500	34,800	47,000	9.25	29,000	3598993
	CHPF4860D6C*+TXV	A*VC950704CXA*	47,000	35,300	17.5	12.5	43,500	34,800	47,000	9.25	29,000	3599002
	CHPF4860D6C*+TXV	A*VC950905DXA*	47,000	35,300	17.5	12.5	43,500	34,800	47,000	9.25	29,000	3599003
	CHPF4860D6C*+TXV	A*VC951155DXA*	47,000	35,300	17.75	12.5	43,500	34,800	47,000	9.25	29,000	3599004
	CHPF4860D6C*+TXV	G*V80905C**	47,000	35,300	17.5	12.5	43,500	34,800	47,000	9.25	29,000	3606638
	CHPF4860D6C*+TXV	G*V81155C**	47,000	35,300	17.5	12.5	43,500	34,800	47,000	9.25	29,000	3606639
	CHPF4860D6C*+TXV	G*VC80905CXA*	47,000	35,300	17	12.2	43,500	34,800	47,000	9.25	29,000	3643039
	CHPF4860D6D*+TXV	MBE2000*-1B*	47,500	35,600	18	13	43,900	35,100	47,500	9.5	29,600	3407538
	CHPF4860D6D*+TXV	MBVC2000*-1A*	47,500	35,600	18	13	43,900	35,100	47,500	9.5	29,600	3610046
	CHPF4860D6D*+TXV	A*V80905C**	47,000	35,300	17.5	12.5	43,500	34,800	47,000	9.25	29,000	3407539
	CHPF4860D6D*+TXV	A*V81155C**	47,000	35,300	17.5	12.5	43,500	34,800	47,000	9.25	29,000	3407540
	CHPF4860D6D*+TXV	G*V950704C**	47,000	35,300	17.5	12.5	43,500	34,800	47,000	9.25	29,000	3407541
	CHPF4860D6D*+TXV	G*V950905D**	47,000	35,300	17.5	12.5	43,500	34,800	47,000	9.25	29,000	3407542
	CHPF4860D6D*+TXV	G*V951155D**	47,000	35,300	17.75	12.5	43,500	34,800	47,000	9.25	29,000	3407543
	CHPF4860D6D*+TXV	G*VC950704CXA*	47,000	35,300	17.5	12.5	43,500	34,800	47,000	9.25	29,000	3599317
	CHPF4860D6D*+TXV	G*VC950905DXA*	47,000	35,300	17.5	12.5	43,500	34,800	47,000	9.25	29,000	3599441
	CHPF4860D6D*+TXV	G*VC951155DXA*	47,000	35,300	17.75	12.5	43,500	34,800	47,000	9.25	29,000	3599600
	CHPF4860D6D*+TXV	G*V80905C**	47,000	35,300	17.5	12.5	43,500	34,800	47,000	9.25	29,000	3606640
	CHPF4860D6D*+TXV	G*V81155C**	47,000	35,300	17.5	12.5	43,500	34,800	47,000	9.25	29,000	3606641
	CHPF4860D6D*+TXV	A*VC80905CXA*	47,000	35,300	17	12.2	43,500	34,800	47,000	9.25	29,000	3643036
	CHPF4860D6D*+TXV	G*VC80905CXA*	47,000	35,300	17	12.2	43,500	34,800	47,000	9.25	29,000	3643040
	CHTF4860D6A*+TXV	MBE2000*-1B*	47,000	35,300	18	13	43,500	34,800	47,500	9.5	29,600	3407544
	CHTF4860D6A*+TXV	MBVC2000*-1A*	47,000	35,300	18	13	43,500	34,800	47,500	9.5	29,600	3610073
	CSCF4860N6C*+TXV	MBE2000*-1B*	47,500	35,600	18	13	43,900	35,100	47,500	9.5	29,600	3407593
	CSCF4860N6C*+TXV	MBVC2000*-1A*	47,500	35,600	18	13	43,900	35,100	47,500	9.5	29,600	3610076
	CSCF4860N6C*+TXV	A*V80905C**	47,000	35,300	17.5	12.5	43,500	34,800	47,000	9.25	29,000	3407545
	CSCF4860N6C*+TXV	A*V81155C**	47,000	35,300	17.5	12.5	43,500	34,800	47,000	9.25	29,000	3407546
	CSCF4860N6C*+TXV	G*V950704C**	47,000	35,300	17.5	12.5	43,500	34,800	47,000	9.25	29,000	3407547
	CSCF4860N6C*+TXV	G*V950905D**	47,000	35,300	17.5	12.5	43,500	34,800	47,000	9.25	29,000	3407548
	CSCF4860N6C*+TXV	G*V951155D**	47,000	35,300	17.75	12.5	43,500	34,800	47,000	9.25	29,000	3407549
	CSCF4860N6C*+TXV	G*VC950704CXA*	47,000	35,300	17.5	12.5	43,500	34,800	47,000	9.25	29,000	3599318
	CSCF4860N6C*+TXV	G*VC950905DXA*	47,000	35,300	17.5	12.5	43,500	34,800	47,000	9.25	29,000	3599442
	CSCF4860N6C*+TXV	G*VC951155DXA*	47,000	35,300	17.75	12.5	43,500	34,800	47,000	9.25	29,000	3599601
	CSCF4860N6C*+TXV	G*V80905C**	47,000	35,300	17.5	12.5	43,500	34,800	47,000	9.25	29,000	3606642
CSCF4860N6C*+TXV	G*V81155C**	47,000	35,300	17.5	12.5	43,500	34,800	47,000	9.25	29,000	3606643	
CSCF4860N6C*+TXV	A*VC80905CXA*	47,000	35,300	17	12.2	43,500	34,800	47,000	9.25	29,000	3643037	
CSCF4860N6C*+TXV	G*VC80905CXA*	47,000	35,300	17	12.2	43,500	34,800	47,000	9.25	29,000	3643041	
CT*F4860*6A*+TXV	MBE1600*-1B*	47,000	35,300	17.5	12.5	43,500	34,800	47,000	9.25	29,000	3407594	
CT*F4860*6A*+TXV	MBE2000*-1B*	47,000	35,300	18	13	43,500	34,800	47,500	9.5	29,600	3407550	
CT*F4860*6A*+TXV	MBVC1600*-1A*	47,000	35,300	17.5	12.5	43,500	34,800	47,000	9.25	29,000	3610121	
CT*F4860*6A*+TXV	MBVC2000*-1A*	47,000	35,300	18	13	43,500	34,800	47,500	9.5	29,600	3610142	

See Notes on Page 24.

AHRI PERFORMANCE RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				TVA RATINGS ³		HEATING CAPACITY			AHRI #
	COILS & AIR HANDLERS	FURNACE/BLOWER	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	HIGH	HSPF ⁴	LOW	
DSZ18 0601A*	AEPF426016C*+TXV		56,000	40,300	16	12.5	51,800	39,900	56,000	9	35,000	3407551
	CA*F4961*6A*+TXV	MBE2000**-.1B*	57,000	41,000	17	12.5	52,700	40,600	57,000	9.5	36,400	3407552
	CA*F4961*6A*+TXV	MBVC2000**-.1A*	57,000	41,000	17	12.5	52,700	40,600	57,000	9.5	36,400	3609987
	CA*F4961*6A*+TXV	A*V80905C**	57,000	41,000	16	12	52,700	40,600	57,000	9.25	35,000	3407553
	CA*F4961*6A*+TXV	A*V81155C**	57,000	41,000	16	12	52,700	40,600	57,000	9.25	35,000	3407554
	CA*F4961*6A*+TXV	G*V950905D**	57,000	41,000	16	12	52,700	40,600	57,000	9.25	35,000	3407555
	CA*F4961*6A*+TXV	G*V951155D**	57,000	41,000	16	12	52,700	40,600	57,000	9.25	35,000	3407556
	CA*F4961*6A*+TXV	G*VC950905DXA*	57,000	41,000	16	12	52,700	40,600	57,000	9.25	35,000	3599464
	CA*F4961*6A*+TXV	G*VC951155DXA*	57,000	41,000	16	12	52,700	40,600	57,000	9.25	35,000	3599628
	CA*F4961*6A*+TXV	G*V90905D**	57,000	41,000	15.5	11.2	52,700	40,600	57,000	9	35,000	3606064
	CA*F4961*6A*+TXV	G*V91155D**	56,000	40,300	15.5	11.5	51,800	39,900	57,000	9	35,000	3606065
	CA*F4961*6A*+TXV	A*VC80905CXA*	57,000	41,000	15.5	11.5	52,700	40,600	57,000	9.25	35,000	3643051
	CA*F4961*6A*+TXV	A*VC81155CXA*	57,000	41,000	15.5	11.5	52,700	40,600	57,000	9.25	35,000	3643054
	CHPF4860D6C*+TXV	MBE2000**-.1B*	57,000	41,000	17	12.5	52,700	40,600	57,000	9.5	36,400	3407557
	CHPF4860D6C*+TXV	A*V80905C**	57,000	41,000	16	12	52,700	40,600	57,000	9.25	35,000	3407558
	CHPF4860D6C*+TXV	A*V81155C**	57,000	41,000	16	12	52,700	40,600	57,000	9.25	35,000	3407559
	CHPF4860D6C*+TXV	G*V950905D**	57,000	41,000	16	12	52,700	40,600	57,000	9.25	35,000	3407560
	CHPF4860D6C*+TXV	G*V951155D**	57,000	41,000	16	12	52,700	40,600	57,000	9.25	35,000	3407561
	CHPF4860D6C*+TXV	G*VC950905DXA*	57,000	41,000	16	12	52,700	40,600	57,000	9.25	35,000	3599465
	CHPF4860D6C*+TXV	G*VC951155DXA*	57,000	41,000	16	12	52,700	40,600	57,000	9.25	35,000	3599629
	CHPF4860D6D*+TXV	MBE2000**-.1B*	57,000	41,000	17	12.5	52,700	40,600	57,000	9.5	36,400	3407562
	CHPF4860D6D*+TXV	MBVC2000**-.1A*	57,000	41,000	17	12.5	52,700	40,600	57,000	9.5	36,400	3610047
	CHPF4860D6D*+TXV	A*V80905C**	57,000	41,000	16	12	52,700	40,600	57,000	9.25	35,000	3407563
	CHPF4860D6D*+TXV	A*V81155C**	57,000	41,000	16	12	52,700	40,600	57,000	9.25	35,000	3407564
	CHPF4860D6D*+TXV	G*V950905D**	57,000	41,000	16	12	52,700	40,600	57,000	9.25	35,000	3407565
	CHPF4860D6D*+TXV	G*V951155D**	57,000	41,000	16	12	52,700	40,600	57,000	9.25	35,000	3407566
	CHPF4860D6D*+TXV	G*VC950905DXA*	57,000	41,000	16	12	52,700	40,600	57,000	9.25	35,000	3599466
	CHPF4860D6D*+TXV	G*VC951155DXA*	57,000	41,000	16	12	52,700	40,600	57,000	9.25	35,000	3599630
	CHPF4860D6D*+TXV	A*VC80905CXA*	57,000	41,000	15.5	11.5	52,700	40,600	57,000	9.25	35,000	3643052
	CHPF4860D6D*+TXV	A*VC81155CXA*	57,000	41,000	15.5	11.5	52,700	40,600	57,000	9.25	35,000	3643055
	CHTF4860D6A*+TXV	MBE2000**-.1B*	57,000	41,000	17	12.5	52,700	40,600	57,000	9.5	36,400	3407567
	CHTF4860D6A*+TXV	MBVC2000**-.1A*	57,000	41,000	17	12.5	52,700	40,600	57,000	9.5	36,400	3610074
	CSCF4860N6C*+TXV	MBE2000**-.1B*	57,000	41,000	17	12.5	52,700	40,600	57,000	9.5	36,400	3407595
	CSCF4860N6C*+TXV	MBVC2000**-.1A*	57,000	41,000	17	12.5	52,700	40,600	57,000	9.5	36,400	3610077
	CSCF4860N6C*+TXV	A*V80905C**	57,000	41,000	16	12	52,700	40,600	57,000	9.25	35,000	3407568
	CSCF4860N6C*+TXV	A*V81155C**	57,000	41,000	16	12	52,700	40,600	57,000	9.25	35,000	3407569
	CSCF4860N6C*+TXV	G*V950905D**	57,000	41,000	16	12	52,700	40,600	57,000	9.25	35,000	3407570
	CSCF4860N6C*+TXV	G*V951155D**	57,000	41,000	16	12	52,700	40,600	57,000	9.25	35,000	3407571
	CSCF4860N6C*+TXV	G*VC950905DXA*	57,000	41,000	16	12	52,700	40,600	57,000	9.25	35,000	3599467
	CSCF4860N6C*+TXV	G*VC951155DXA*	57,000	41,000	16	12	52,700	40,600	57,000	9.25	35,000	3599631
CSCF4860N6C*+TXV	A*VC80905CXA*	57,000	41,000	15.5	11.5	52,700	40,600	57,000	9.25	35,000	3643053	
CSCF4860N6C*+TXV	A*VC81155CXA*	57,000	41,000	15.5	11.5	52,700	40,600	57,000	9.25	35,000	3643056	
CT*F4860*6A*+TXV	MBE2000**-.1B*	57,000	41,000	17	12.5	52,700	40,600	57,000	9.5	36,400	3407572	
CT*F4860*6A*+TXV	MBVC2000**-.1A*	57,000	41,000	17	12.5	52,700	40,600	57,000	9.5	36,400	3610143	


¹ Energy Efficiency Ratio @ 80°F/ 67°F/ 95°F² Seasonal Energy Efficiency Ratio; Certified per AHRI 210/240 @ 80°F/ 67°F/ 95°F

³ HSPF = Heating Seasonal Performance Factor

NOTES:


- Always check the S&R plate for electrical data on the unit being installed.
- When matching the outdoor unit to the indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- EEP - Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is not interchangeable with B13707-35S. The Goodman Gas Furnace contains the EEP cooling time delay

DIMENSIONS

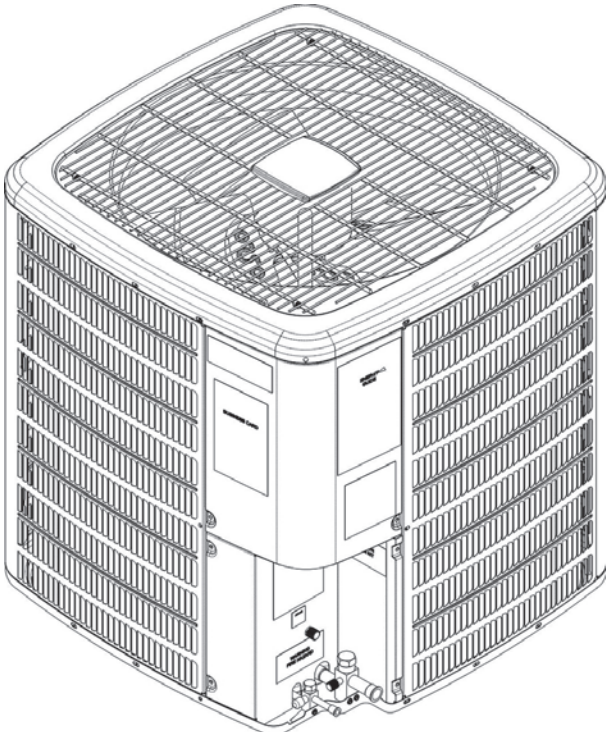

MODEL	W"	D"	H"
DSZ180361A	35½	35½	38¼
DSZ180481A	35½	35½	38¼
DSZ180601A	35½	35½	38¼

DSZ18 WIRING DIAGRAM

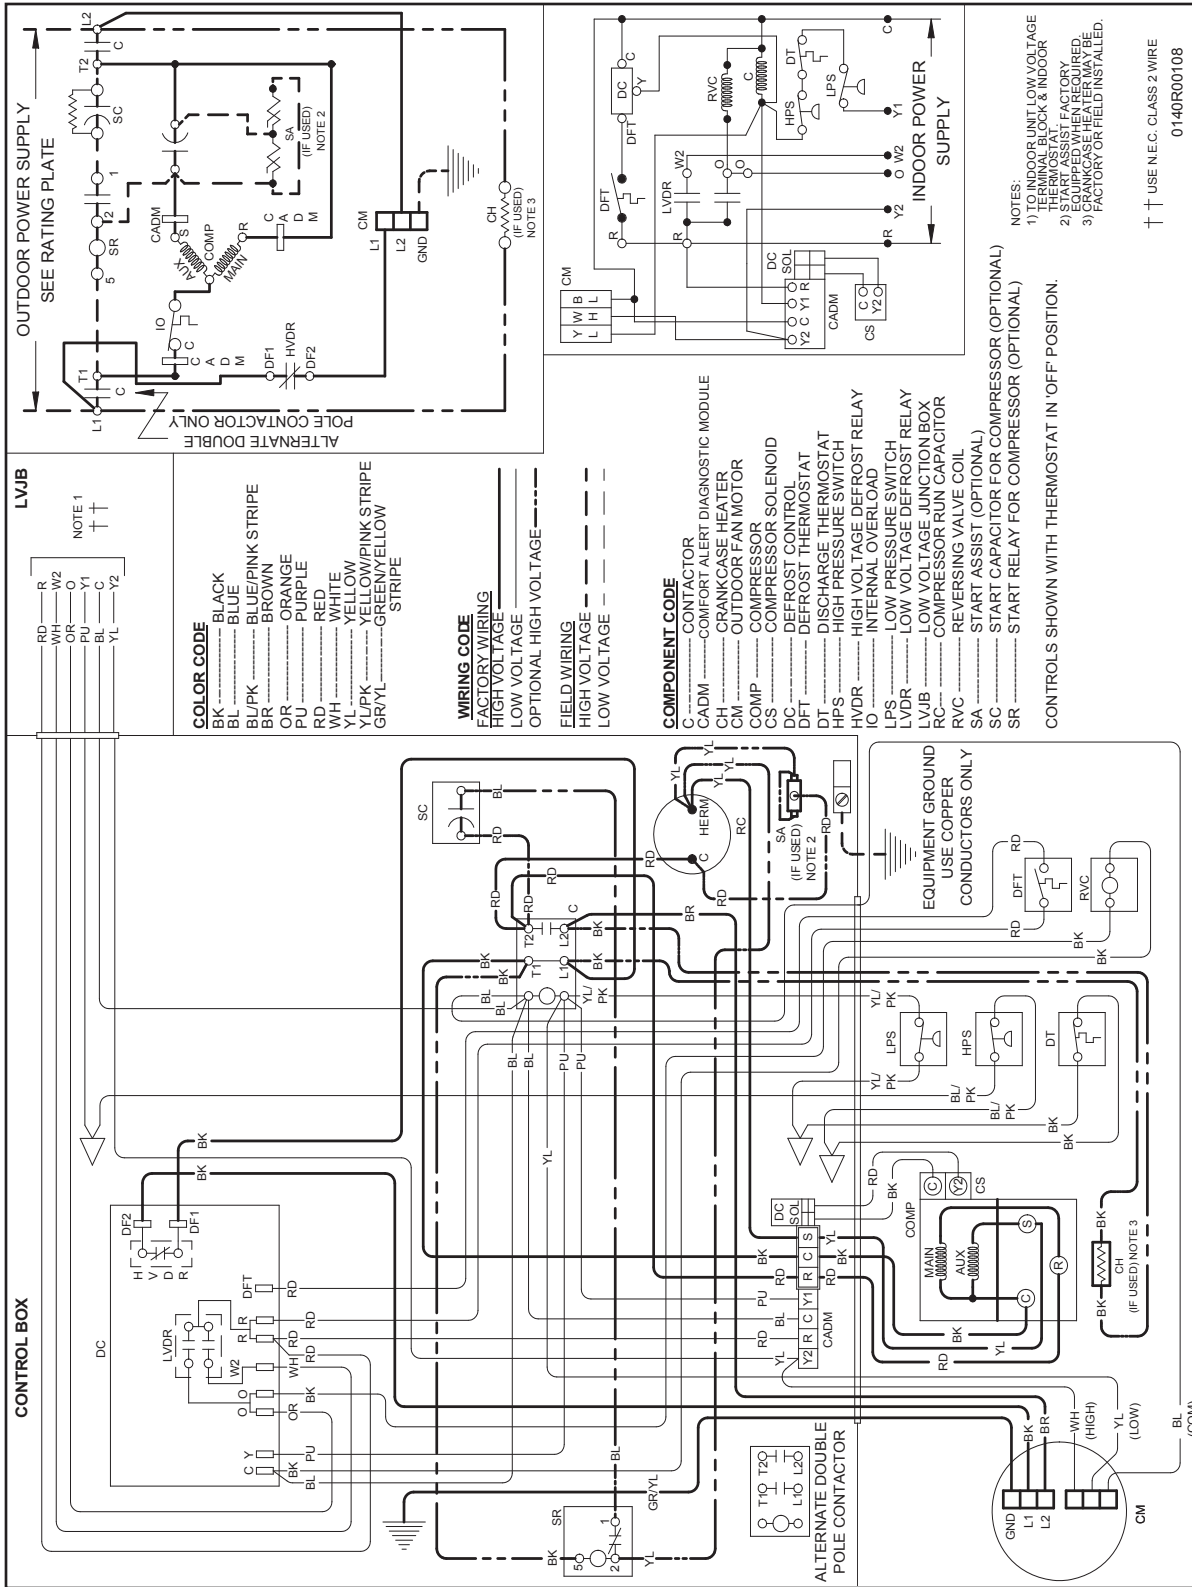

ACCESSORIES

MODEL	DESCRIPTION	DSZ18 036	DSZ18 048	DSZ18 060
ABK-20	Anchor Bracket Kit ▼	X	X	X
ASC01	Anti-Short Cycle Kit	X	X	X
CSR-U-1	Hard-start Kit	X		
CSR-U-2	Hard-start Kit	X	X	X
CSR-U-3	Hard-start Kit		X	X
FSK01A ¹	Freeze Protection Kit	X	X	X
OT18-60A ²	Outdoor Thermostat w/ Lockout Stat	X	X	X
TX3N4 ³	TXV Kit	X		
TX5N4 ³	TXV Kit		X	X

▼ Contains 20 brackets; four brackets needed to anchor unit to pad

¹ Installed on indoor coil

² Required for heat pump applications where ambient temperatures fall below 0° F with 50% or higher relative humidity.

³ Field-installed, non-bleed, expansion valve kit — Condensing units and heat pumps with reciprocating compressors require the use of start-assist components when used in conjunction with an indoor coil using a non-bleed thermal expansion valve refrigerant metering device.

PRODUCT SPECIFICATIONS

NOTES

